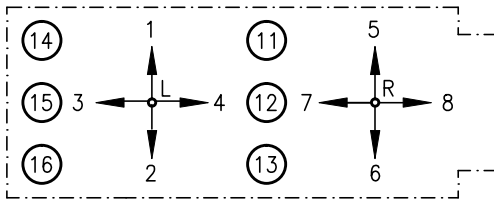


TP-T-011

Portable control station T-011, insulated IP65
Dimensions see sheet TI-T011

TP-T-011

Fittings:

Pos. 1-4, 5-8... controller

Pos. 11-16... control devices $\varnothing 22,5$ mm
or 16 mm programm

Photo with VCS0 controller,
control devices $\varnothing 22,5$ mm,
rotating cable entry

Type		Spobu Id.Nr.	
T-011	Portable control station, yellow - without bores - without inserts - with shoulder straps - roll-over bar - rotating cable entry (M32x1,5 for cable $\varnothing 13,5-20$ mm)	20371	
TC011	Portable control station , yellow - with bores in cover: pos. 1-4 + 5-8 VCS0 controller pos. 11, 12, 14-16 $\varnothing 22,5$ mm pos. 13 $\varnothing 16,2$ mm - without inserts - with shoulder straps - roll-over bar - rotating cable entry (M32x1,5 for cable $\varnothing 13,5-20$ mm)		

Equipments:

Controllers: { **MON** see sheet J-M0.....
VCS0 see sheet J-VCS0.....
CS1 see sheet J-CS1.....
ST0 see sheet J-ST0.....

Push buttons, lamps, selector switch see sheet B-1/2, B-2/2

On request completely wired with control cable and plug connection available.

Options:

other bores, cutouts provision of layout inclusively

according to cost



Spohn + Burkhardt
Elektrotechnische Fabrik Blaubeuren

Mauergasse 5
89143 BLAUBEUREN
GERMANY

Tel. +49 7344 171-0 info@spobu.de
Fax +49 7344 171-99 www.spobu.de