



# KDPS070

LONG DISTANCE PLASTIC COVER TYPE

- Material : Engineering Plastic with Glass Fiber +  $\alpha$
- Speed : 3 m/sec
- Temperature : -25 ~ 125°C


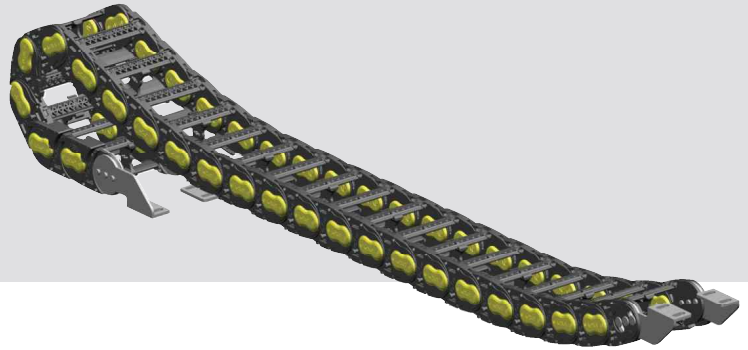


## Structure


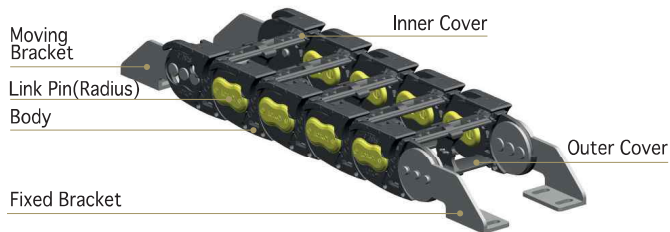



## End Bracket

### Fixed Bracket

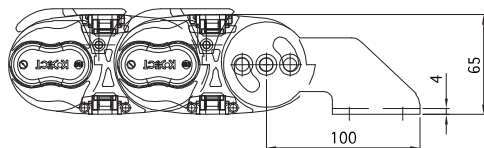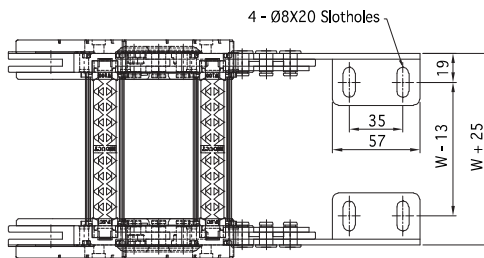


### Moving Bracket

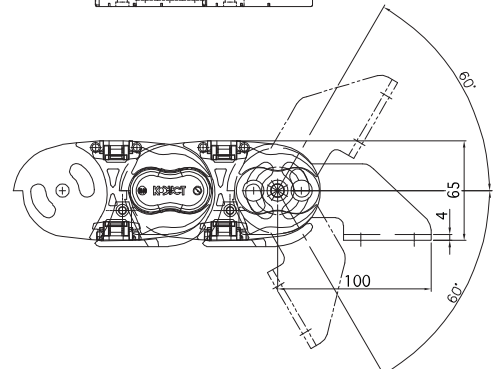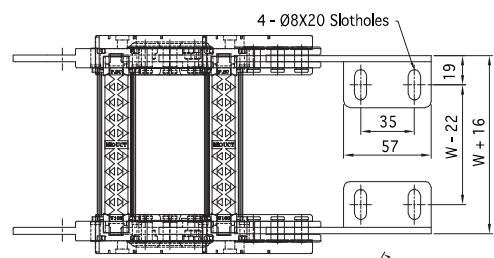

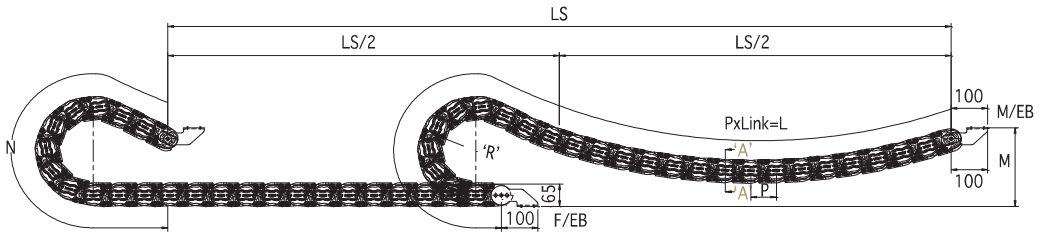


$$L = \frac{LS}{2} + N$$
 LS: Total Machine Travel, L: Length, N: Safety Length+πr,  
 M: Moving Bracket Height, P: Pitch, M/EB: Moving End Bracket, F/EB: Fixed End Bracket

Section A-A

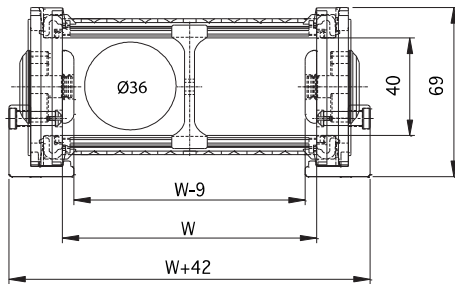

Divider

\* Separator: Ø6(Aluminum)



Specification

TYPE	W mm(inch)	Radius mm(inch)	Pitch mm(inch)	M mm(inch)	N mm(inch)	DVDR (ea)	1M (kg)	EB Set (kg)
KDPS070	65 (2.559)	75 (2.952)	70 (3.937)	230 (9.055)	800 (31,496)	0	2.513	0.982
	75 (2.952)				0	2.541		
	80 (3.149)	100 (3.937)			1,000 (39,370)	1	2.596	
	87 (3.425)				1	2.618		
	100 (3.937)	130 (5.118)			1,500 (59,055)	1	2.694	
	120 (4.724)				2	2.773		
	150 (5.905)	180 (7.086)			1,800 (70,866)	2	2.869	
	160 (6.299)				2	2.936		
	175 (6.889)	230 (9.055)			2,100 (82,677)	2	2.978	
	187 (7.362)				2	3.011		
200 (7.874)		2	3.070					

\* 1inch = 25.4mm