



SRS070

LONG DISTANCE ALUMINUM BAR TYPE

- Material : Engineering Plastic with Glass Fiber + α , Aluminum Bar
- Speed : 5 m/sec
- Temperature : -25 ~ 125°C


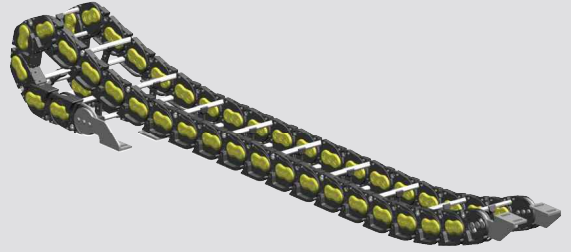


Structure


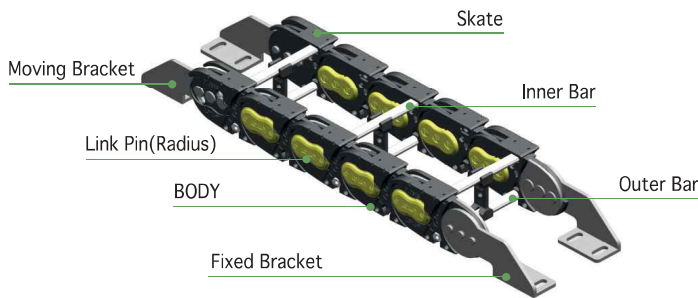



End Bracket

Fixed Bracket

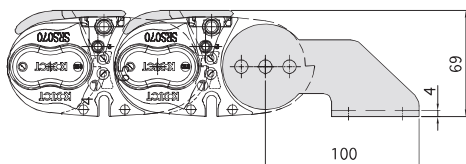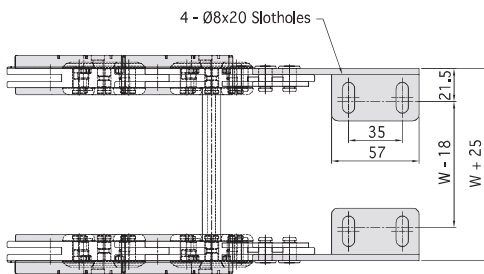

Moving Bracket

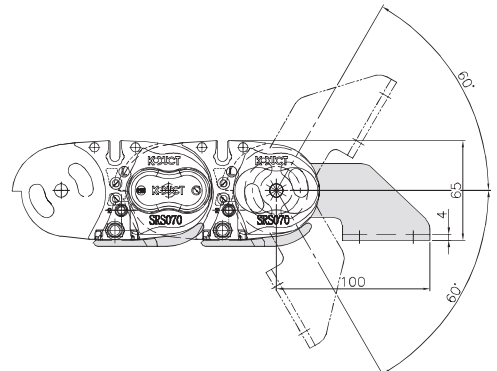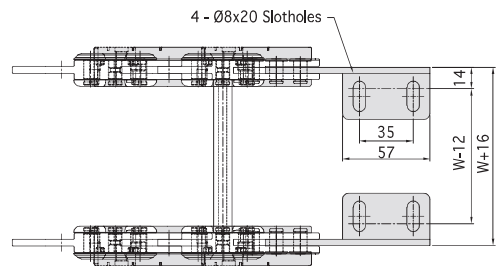


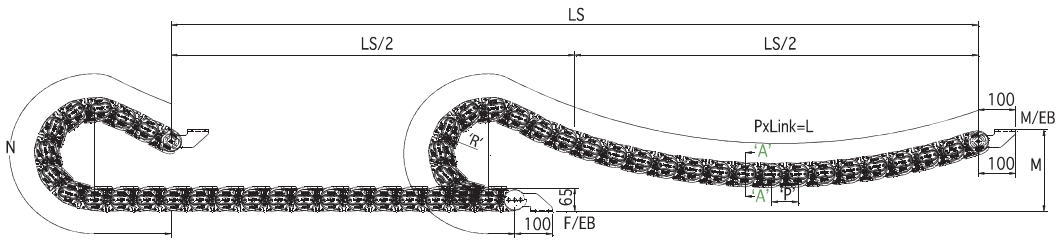


$L = \frac{LS}{2} + N$ LS: Total Machine Travel, L: Length, N: Safety length+ πr , M: Moving Bracket Height, P: Pitch, F/MB: Fixed End Bracket, M/EB: Moving End Bracket

Section A-A

Divider

* Separator: $\varnothing 6$ (Aluminum)

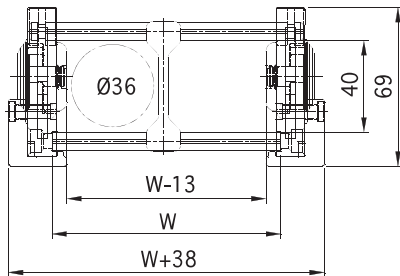

Specification

TYPE	W mm(inch)	Radius mm(inch)	Pitch mm(inch)	M mm(inch)	N mm(inch)	DVDR (ea)	1M (kg)	EB Set (kg)
SRS070	80 (3.149)	75 (2.953)	70 (2.756)	230 (9.055)	800 (31.496)	1	2.399	0.982
	100 (3.937)	100 (3.937)			1,000 (39.370)	1	2.413	
	120 (4.724)	100 (3.937)			1,000 (39.370)	2	2.443	
	150 (5.906)	130 (5.118)			1,500 (59.055)	2	2.454	
	200 (7.874)	180 (7.087)			1,800 (70.866)	3	2.492	
	250 (9.843)	230 (9.055)			2,100 (82.677)	3	2.535	
	300 (11.811)	230 (9.055)			2,100 (82.677)	4	2.583	
	350 (13.780)	230 (9.055)			2,100 (82.677)	4	2.614	
400 (15.748)	230 (9.055)	2,100 (82.677)	4	2.662				

* Width 주문에 따라 제작가능 (Width follows in oder)

* 1inch = 25.4mm