



SRS080

LONG DISTANCE ALUMINUM BAR TYPE

- Material : Engineering Plastic with Glass Fiber + α , Aluminum Bar
- Speed : 5 m/sec
- Temperature : -25 ~ 125°C

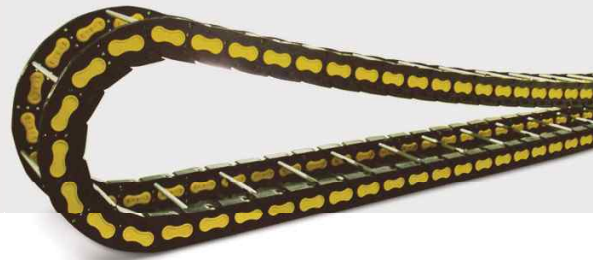


Structure

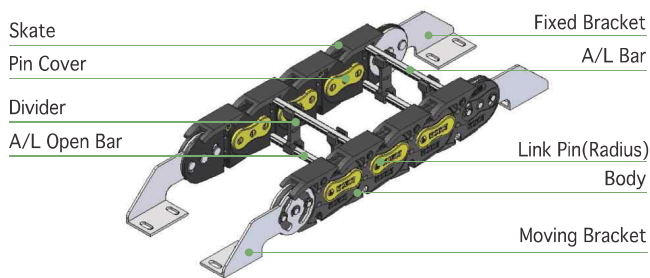



End Bracket

Fixed Bracket

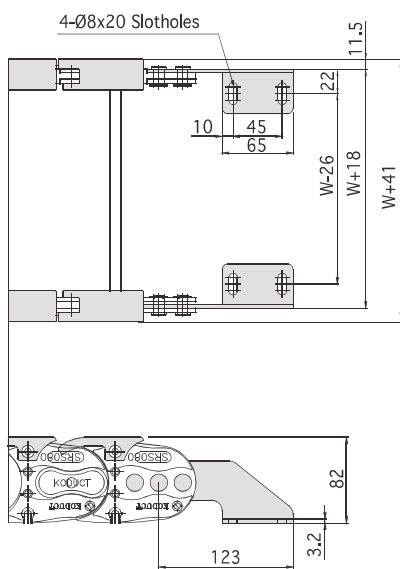

Moving Bracket

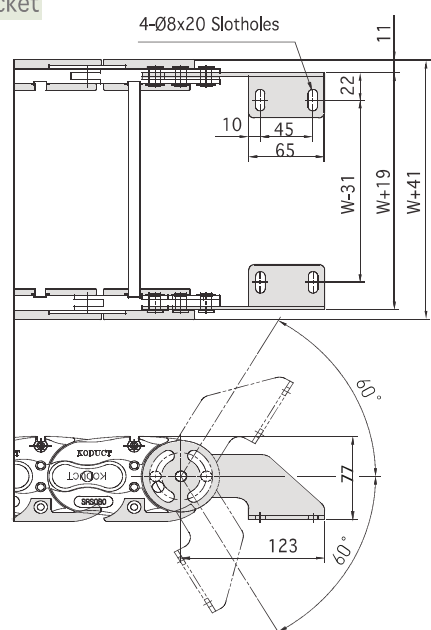


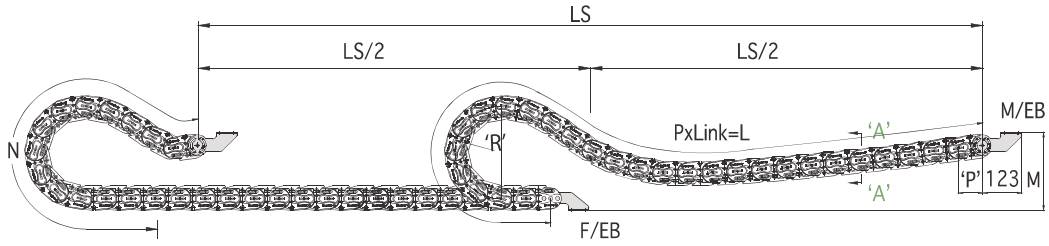


$L = \frac{LS}{2} + N$ LS: Total Machine Travel, L: Length, N: Safety Length+ πr , M: Moving Bracket Height,
P: Pitch, F/MB: Fixed End Bracket, M/EB: Moving End Bracket

Section A-A

Divider

* Separator: $\varnothing 6$ (Aluminum)

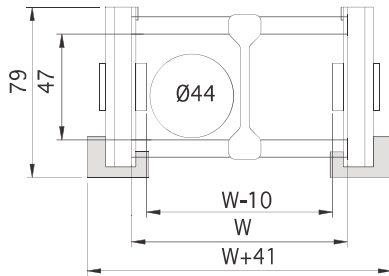

Specification

TYPE	W mm(inch)	Radius mm(inch)	Pitch mm(inch)	M mm(inch)	N mm(inch)	DVDR (ea)	1M (kg)	EB Set (kg)
SRS080	80 (3.149)	150 (5.906)	80 (3.150)	250 (9.843)	1,000 (39.370)	1	3.264	1.310
	100 (3.937)	150 (5.906)			1,300 (51.181)	1	3.322	
	150 (5.906)	200 (7.874)			1,600 (62.992)	2	3.512	
	200 (7.874)	250 (9.843)			2,000 (78.740)	2	3.659	
	250 (9.843)	250 (9.843)			2,000 (78.740)	3	3.851	
	300 (11.811)	280 (11.024)			2,000 (78.740)	3	4.002	
	350 (13.780)	300 (11.811)			2,000 (78.740)	4	4.196	
	400 (15.748)	400 (15.748)			3,000 (118.110)	4	5.263	

* Width 주문에 따라 제작가능 (Width follows in oder)

* 1inch = 25.4mm