



SRS150

LONG DISTANCE ALUMINUM BAR TYPE

- Material : Engineering Plastic with Glass Fiber + α , Aluminum Bar
- Speed : 5 m/sec
- Temperature : -25 ~ 125°C

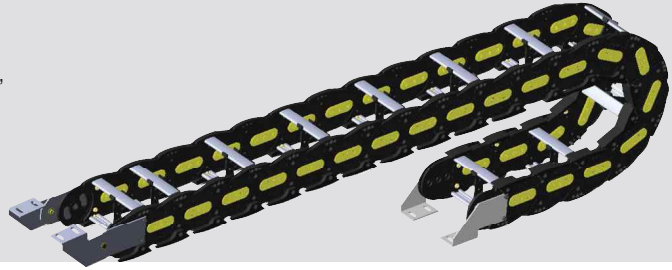


Structure

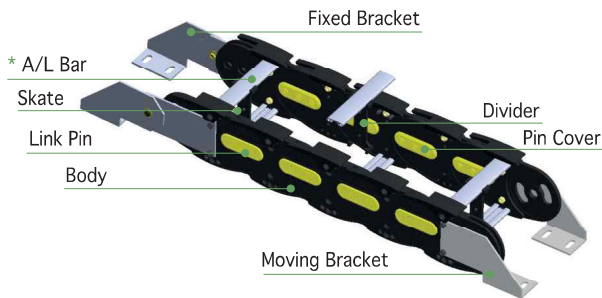


* A/L Bar

Type 1 : Standard (41.3mm)

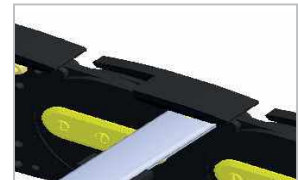


Type 2 : 92mm

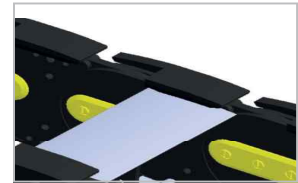



End Bracket

Fixed Bracket

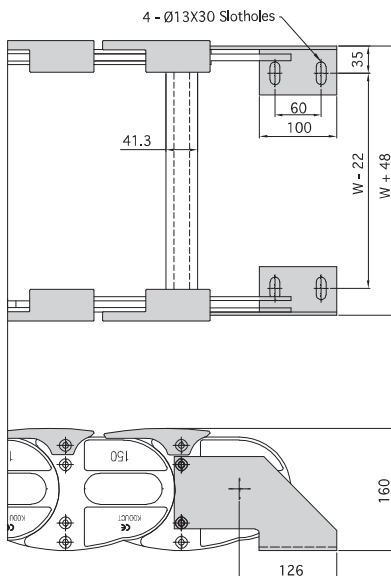

Moving Bracket

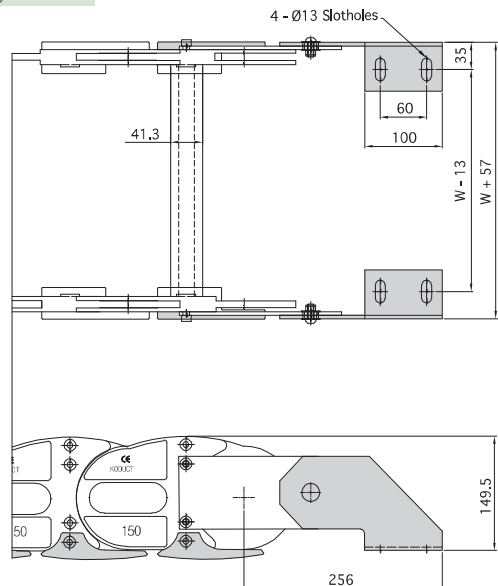


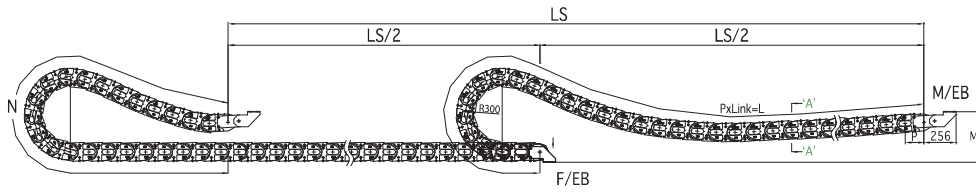


$L = \frac{LS}{2} + N$ LS: Total Machine Travel, L: Length, N: Safety Length+πr, M: Moving Bracket Height, P: Pitch, F/MB: Fixed End Bracket, M/EB: Moving End Bracket

Section A-A

Divider

* Separator: Ø6 (Aluminum)

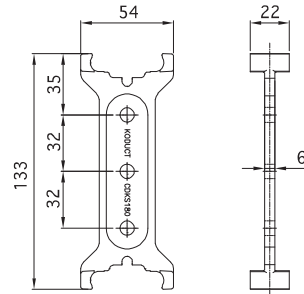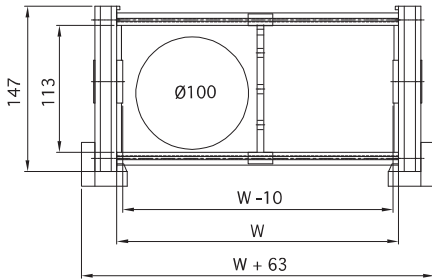

Specification

TYPE	W mm(inch)	Radius mm(inch)	Pitch mm(inch)	M mm(inch)	N mm(inch)	DVDR (ea)	1M (kg)	EB Set (kg)
SRS150	100 (3.937)	200 (7.874)	150 (5.906)	400 (15.748)	2,000 (78.740)	1	4.512	4.376
	200 (7.874)					2	4.747	
	250 (9.843)				3,300 (129.921)	3	4.917	
	300 (11.811)	3				5.149		
	350 (13.780)	400 (15.748)			4	5.317		
	400 (15.748)				4	5.591		
	450 (17.716)				4	5.759		
	500 (19.685)	500 (19.685)			4	5.759		
	600 (23.622)				4	7.374		
	700 (27.559)	600 (23.622)			4	7.374		
800 (31.496)	4		7.933					

* Width 주문에 따라 제작가능 (Width follows in oder)

* 1inch = 25.4mm