

PCE

Connection
to the future



Industrial plugs and sockets


Product overview

MADE IN AUSTRIA



PCE

Connection
to the future

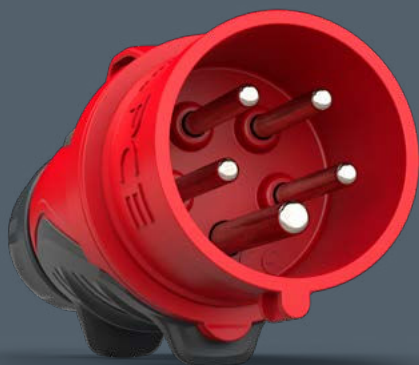

PCE is a world leader in the development and production of industrial plugs and sockets with an export share of over 80%! Since the first production of CEE plugs and sockets in 1973 the company continued to develop and to become an international group of companies.

PCE offers a wide range of high quality products for various applications in the electrical installation sector. The range is constantly updated and currently includes approximately 23.000 items. In addition to our standard products PCE is able to produce customer-specific configurations on modern injection molding and metal processing plants within a few days.

High level of quality (ISO 9001:2015 Certification), flexibility and constant innovation of products and processes are among the most important factors of our successful customer-oriented strategy.

Speed is top priority! Rapid delivery times and reliability through efficient manufacturing methods and uncomplicated order processing have been appreciated by our customers for years.

Continuous innovation of products and processes paired with the close cooperation with our customers makes PCE a strong, worldwide partner for the professional use of industrial plugs and sockets in electrical installation!

Amp.	Poles	110V~	230V~	400V~	>50V others
		50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	1h
		Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	013-4	013-6	013-9	013-1
16	4	014-4	014-9	014-6	014-1
16	5	015-4	015-9	015-6	015-1
32	3	023-4	023-6	023-9	023-1
32	4	024-4	024-9	024-6	024-1
32	5	025-4	025-9	025-6	025-1

CEE Plugs

Plug IP44/54 **SHARK**

- with screw terminals
- contacts: brass

IP44/54



16	3	013-4TT	013-6TT	013-9TT	
16	4	014-4TT	014-9TT	014-6TT	
16	5	015-4TT	015-9TT	015-6TT	
32	3	023-4TT	023-6TT	023-9TT	
32	4	024-4TT	024-9TT	024-6TT	
32	5	025-4TT	025-9TT	025-6TT	

Plug IP44/54 **SHARK TT**

- screwless connection technology
- contacts: brass

IP44/54

TURBO
TERMINAL



16	3	0132-4	0132-6	0132-9	0132-1
16	4	0142-4	0142-9	0142-6	0142-1
16	5	0152-4	0152-9	0152-6	0152-1
32	3	0232-4	0232-6	0232-9	0232-1
32	4	0242-4	0242-9	0242-6	0242-1
32	5	0252-4	0252-9	0252-6	0252-1

Plug IP66/67 **SHARK**

- with screw terminals
- contacts: brass

IP66/67



16	3	0132-4TT	0132-6TT	0132-9TT	
16	4	0142-4TT	0142-9TT	0142-6TT	
16	5	0152-4TT	0152-9TT	0152-6TT	
32	3	0232-4TT	0232-6TT	0232-9TT	
32	4	0242-4TT	0242-9TT	0242-6TT	
32	5	0252-4TT	0252-9TT	0252-6TT	

Plug IP66/67 **SHARK TT**

- screwless connection technology
- contacts: brass

IP66/67

TURBO
TERMINAL



63	3	033-4	033-6	033-9	033-1
63	4	034-4	034-9	034-6	034-1
63	5	035-4	035-9	035-6	035-1
125	3	043-4	043-6	043-9	043-1
125	4	044-4	044-9	044-6	044-1
125	5	045-4	045-9	045-6	045-1

Plug IP66/67 **POWER TWIST**

- contact frame with screws
- contacts: brass nickel-plated
- with pilot contact

IP66/67

**POWER
TWIST**



16	3	8013-4	8013-6	8013-9	8013-1
16	4	8014-4	8014-9	8014-6	8014-1
16	5	8015-4	8015-9	8015-6	8015-1
32	3	8023-4	8023-6	8023-9	8023-1
32	4	8024-4	8024-9	8024-6	8024-1
32	5	8025-4	8025-9	8025-6	8025-1

Angled plug IP44 **TWIST**

- with screw terminals
- contacts: brass

IP44 (IP67 on request)



16	3	8013-4TT	8013-6TT	8013-9TT	
16	4	8014-4TT	8014-9TT	8014-6TT	
16	5	8015-4TT	8015-9TT	8015-6TT	
32	3	8023-4TT	8023-6TT	8023-9TT	
32	4	8024-4TT	8024-9TT	8024-6TT	
32	5	8025-4TT	8025-9TT	8025-6TT	

Angled plug IP44 **TWIST TT**

- screwless connection technology
- contacts: brass

IP44 (IP67 on request)

TURBO
TERMINAL



16	4		7014-9	7014-6	IP44
16	4		70142-9	70142-6	IP66/67
16	5			7015-6	IP44
16	5			70152-6	IP66/67
32	4		7024-9	7024-6	IP44
32	4		70242-9	70242-6	IP66/67
32	5			7025-6	IP44
32	5			70252-6	IP66/67

Phase inverter plug **SHARK**

- with screw terminals
- contacts: brass nickel-plated

IP44, IP66/67



CEE Plugs and connectors

Plug IP44/54 GRIP

- with screw terminals
- housing material: 2K (PA6/TPE)
- contacts: brass

IP44/54



Amp.	Poles	110V~	230V~	400V~
		50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h
		Cat.No.	Cat.No.	Cat.No.
16	5	0153-4	0153-9	0153-6
32	5	0253-4	0253-9	0253-6

Plug IP44/54 GRIP TT

- screwless connection technology
- housing material: 2K (PA6/TPE)
- contacts: brass

IP44/54

TURBO
TERMINAL



16	5	0153-4TT	0153-9TT	0153-6TT
32	5	0253-4TT	0253-9TT	0253-6TT

Connector IP44/54 GRIP

- with screw terminals
- housing material: 2K (PA6/TPE)
- contacts: brass

IP44/54



16	5	2153-4	2153-9	2153-6
32	5	2253-4	2253-9	2253-6

Connector IP44/54 GRIP TT

- screwless connection technology
- housing material: 2K (PA6/TPE)
- contacts: brass

IP44/54

TURBO
TERMINAL



16	5	2153-4TT	2153-9TT	2153-6TT
32	5	2253-4TT	2253-9TT	2253-6TT

Phase inverter plug IP44/54 GRIP

- with screw terminals
- housing material: 2K (PA6/TPE)
- contacts: brass nickel-plated

IP44/54



16	5			70153-6
32	5			70253-6

Phase inverter plug IP44/54 GRIP TT

- L1, N, PE = screwless connection techn.
- L2, L3 = screw terminals
- housing material: 2K (PA6/TPE)
- contacts: brass nickel-plated

IP44/54

TURBO
TERMINAL



16	5			70153-6TT
32	5			70253-6TT



Amp.	Poles	110V~	230V~	400V~	>50V others
		50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	1h
		Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	513-4	513-6	513-9	513-1
16	4	514-4	514-9	514-6	514-1
16	5	515-4	515-9	515-6	515-1
32	3	523-4	523-6	523-9	523-1
32	4	524-4	524-9	524-6	524-1
32	5	525-4	525-9	525-6	525-1

Wall mounted plug IP44

- with screw terminals
- top (M25) or rear entry

IP44 (IP67 on request)



16	3	9513-4	9513-6	9513-9	9513-1
16	4	9514-4	9514-9	9514-6	9514-1
16	5	9515-4	9515-9	9515-6	9515-1
32	3	9523-4	9523-6	9523-9	9523-1
32	4	9524-4	9524-9	9524-6	9524-1
32	5	9525-4	9525-9	9525-6	9525-1

Wall mounted plug IP44

- with screw terminals
- for wiring through
- top (M25), 2x bottom (M25) or rear entry

IP44



63	3	533-4	533-6	533-9	533-1
63	4	534-4	534-9	534-6	534-1
63	5	535-4	535-9	535-6	535-1

Wall mounted plug IP66/67

POWER TWIST

- top (M40), bottom (2xM32) or rear entry
- nickel-plated contacts, with pilot contact
- waterproof cover and cable-glands are available

IP66/67

POWER
TWIST



125	3	543-4	543-6	543-9	543-1
125	4	544-4	544-9	544-6	544-1
125	5	545-4	545-9	545-6	545-1

Wall mounted plug IP66/67

POWER TWIST

- top (M63), bottom (2xØ40) or rear entry
- nickel-plated contacts, with pilot contact
- waterproof cover and cable-glands are available

IP66/67

POWER
TWIST



flange: 70x70; fixing center 56x56

16	3	613-4	613-6	613-9	613-1
16	4	614-4	614-9	614-6	614-1
16	5	615-4	615-9	615-6	615-1
32	3	623-4	623-6	623-9	623-1
32	4	624-4	624-9	624-6	624-1
32	5	625-4	625-9	625-6	625-1

Flanged plug straight IP44

- with screw terminals

IP44

other flange sizes, screwless terminals or IP67 on request



flange: 100x100; fixing center 80x80

63	3	633-4	633-6	633-9	633-1
63	4	634-4	634-9	634-6	634-1
63	5	635-4	635-9	635-6	635-1

flange: 120x120; fixing center 100x100

125	3	643-4	643-6	643-9	643-1
125	4	644-4	644-9	644-6	644-1
125	5	645-4	645-9	645-6	645-1

Flanged plug straight IP66/67

POWER TWIST

- nickel-plated contacts, with pilot contact
- waterproof cover available as accessory

IP66/67 (IP44 on request)

POWER
TWIST



flange: 100x112; fixing center 80x88

63	3	733-4	733-6	733-9	733-1
63	4	734-4	734-9	734-6	734-1
63	5	735-4	735-9	735-6	735-1

flange: 120x130; fixing center 100x108

125	3	743-4	743-6	743-9	743-1
125	4	744-4	744-9	744-6	744-1
125	5	745-4	745-9	745-6	745-1

Flanged plug angled IP66/67

POWER TWIST

- nickel-plated contacts, with pilot contact
- waterproof cover available as accessory

IP66/67

POWER
TWIST



16	3	77713-4	77713-6	77713-9	77713-1
16	4	77714-4	77714-9	77714-6	77714-1
16	5	77715-4	77715-9	77715-6	77715-1
32	3	77723-4	77723-6	77723-9	77723-1
32	4	77724-4	77724-9	77724-6	77724-1
32	5	77725-4	77725-9	77725-6	77725-1

Flanged plug angled IP44

TWIST

- with screw terminals

IP44 (IP67 on request)



CEE Connectors and sockets

Connector IP44/54 SHARK

- with screw terminals
- contacts: brass

IP44/54



Amp.	Poles	110V~	230V~	400V~	>50V others
		50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	1h
		Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	213-4	213-6	213-9	213-1
16	4	214-4	214-9	214-6	214-1
16	5	215-4	215-9	215-6	215-1
32	3	223-4	223-6	223-9	223-1
32	4	224-4	224-9	224-6	224-1
32	5	225-4	225-9	225-6	225-1

Connector IP44/54 SHARK TT

- screwless connection technology
- contacts: brass

IP44/54



16	3	213-4TT	213-6TT	213-9TT	
16	4	214-4TT	214-9TT	214-6TT	
16	5	215-4TT	215-9TT	215-6TT	
32	3	223-4TT	223-6TT	223-9TT	
32	4	224-4TT	224-9TT	224-6TT	
32	5	225-4TT	225-9TT	225-6TT	

Connector IP66/67 SHARK

- with screw terminals
- contacts: brass

IP66/67



16	3	2132-4	2132-6	2132-9	2132-1
16	4	2142-4	2142-9	2142-6	2142-1
16	5	2152-4	2152-9	2152-6	2152-1
32	3	2232-4	2232-6	2232-9	2232-1
32	4	2242-4	2242-9	2242-6	2242-1
32	5	2252-4	2252-9	2252-6	2252-1

Connector IP66/67 SHARK TT

- screwless connection technology
- contacts: brass

IP66/67



16	3	2132-4TT	2132-6TT	2132-9TT	
16	4	2142-4TT	2142-9TT	2142-6TT	
16	5	2152-4TT	2152-9TT	2152-6TT	
32	3	2232-4TT	2232-6TT	2232-9TT	
32	4	2242-4TT	2242-9TT	2242-6TT	
32	5	2252-4TT	2252-9TT	2252-6TT	

Connector IP66/67 POWER TWIST

- contact frame with screws
- with lamellar contact

IP66/67



63	3	233-4	233-6	233-9	233-1
63	4	234-4	234-9	234-6	234-1
63	5	235-4	235-9	235-6	235-1
125	3	243-4	243-6	243-9	243-1
125	4	244-4	244-9	244-6	244-1
125	5	245-4	245-9	245-6	245-1

Wall socket IP44

- with screw terminals
- top (M25) or rear entry

IP44



16	3	113-4	113-6	113-9	113-1
16	4	114-4	114-9	114-6	114-1
16	5	115-4	115-9	115-6	115-1
32	3	123-4	123-6	123-9	123-1
32	4	124-4	124-9	124-6	124-1
32	5	125-4	125-9	125-6	125-1

Wall socket IP44 TT

- screwless connection technology
- top (M25) or rear entry

IP44



16	3	113-4TT	113-6TT	113-9TT	
16	4	114-4TT	114-9TT	114-6TT	
16	5	115-4TT	115-9TT	115-6TT	
32	3	123-4TT	123-6TT	123-9TT	
32	4	124-4TT	124-9TT	124-6TT	
32	5	125-4TT	125-9TT	125-6TT	

Wall socket IP67

- with screw terminals
- top (M25) or rear entry

IP67



16	3	1132-4	1132-6	1132-9	1132-1
16	4	1142-4	1142-9	1142-6	1142-1
16	5	1152-4	1152-9	1152-6	1152-1
32	3	1232-4	1232-6	1232-9	1232-1
32	4	1242-4	1242-9	1242-6	1242-1
32	5	1252-4	1252-9	1252-6	1252-1

Amp.	Poles	110V~	230V~	400V~	>50V others
		50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	1h
		Cat.No.	Cat.No.	Cat.No.	Cat.No.
63	3	133-4	133-6	133-9	133-1
63	4	134-4	134-9	134-6	134-1
63	5	135-4	135-9	135-6	135-1

Wall socket IP66/67 POWER TWIST

- top (M40), bottom (2xM32) or rear entry
- with lamellar contact
- to order with pilot contact please add a "5" e.g.: 1335-6

IP66/67

POWER
TWIST



63	3	1337-4	1337-6	1337-9	1337-1
63	4	1347-4	1347-9	1347-6	1347-1
63	5	1357-4	1357-9	1357-6	1357-1
125	3	143-4	143-6	143-9	143-1
125	4	144-4	144-9	144-6	144-1
125	5	145-4	145-9	145-6	145-1

Wall socket IP66/67 POWER TWIST

- top, bottom or rear entry
- with lamellar contact
- to order with pilot contact please add a "5" e.g.: 13575-6

IP66/67

POWER
TWIST



16	3		9213-6		
16	4		9214-9	9214-6	
16	5			9215-6	
32	3		9223-6		
32	4			9224-6	
32	5			9225-6	

Wall socket COMBO IP44

- with integrated socket*, connecting terminals up to 10mm², ready wired
- for Combo-wall socket 32A the socket (DIN 49440) is protected by fuse (10A slow)

IP44

* conforming to Austrian/German system, other versions on request!



flange: 75x75; fixing center 60x60

16	3	313-4f7	313-6f7	313-9f7	313-1f7
16	4	314-4f7	314-9f7	314-6f7	314-1f7
16	5	315-4f7	315-9f7	315-6f7	315-1f7
32	3	323-4f7	323-6f7	323-9f7	323-1f7
32	4	324-4f7	324-9f7	324-6f7	324-1f7
32	5	325-4f7	325-9f7	325-6f7	325-1f7

Flanged socket straight IP44

- with screw terminals
- other versions on request

IP44

IP44/IP54 (16A 3p, 16A 5p, 32A 5p)



flange: 75x75; fixing center 60x60

16	3	313-4TTf7	313-6TTf7	313-9TTf7	
16	4	314-4TTf7	314-9TTf7	314-6TTf7	
16	5	315-4TTf7	315-9TTf7	315-6TTf7	
32	3	323-4TTf7	323-6TTf7	323-9TTf7	
32	4	324-4TTf7	324-9TTf7	324-6TTf7	
32	5	325-4TTf7	325-9TTf7	325-6TTf7	

Flanged socket straight IP44 TT

- screwless connection technology
- other versions on request

IP44

IP44/IP54 (16A 3p, 16A 5p, 32A 5p)

TURBO
TERMINAL



flange: 75x75; fixing center 60x60

16	3	3132-4	3132-6	3132-9	3132-1
16	4	3142-4	3142-9	3142-6	3142-1
16	5	3152-4	3152-9	3152-6	3152-1
32	3	3232-4	3232-6	3232-9	3232-1
32	4	3242-4	3242-9	3242-6	3242-1
32	5	3252-4	3252-9	3252-6	3252-1

Flanged socket straight IP67

- with screw terminals
- other versions on request

IP67



flange: 75x75; fixing center 60x60

16	3	3132-4TT	3132-6TT	3132-9TT	
16	4	3142-4TT	3142-9TT	3142-6TT	
16	5	3152-4TT	3152-9TT	3152-6TT	
32	3	3232-4TT	3232-6TT	3232-9TT	
32	4	3242-4TT	3242-9TT	3242-6TT	
32	5	3252-4TT	3252-9TT	3252-6TT	

Flanged socket straight IP67 TT

- screwless connection technology
- other versions on request

IP67

TURBO
TERMINAL



flange: 100x100; fixing center 80x80

63	3	333-4	333-6	333-9	333-1
63	4	334-4	334-9	334-6	334-1
63	5	335-4	335-9	335-6	335-1

flange: 120x120; fixing center 100x100

125	3	343-4	343-6	343-9	343-1
125	4	344-4	344-9	344-6	344-1
125	5	345-4	345-9	345-6	345-1

Flanged socket straight IP66/67 POWER TWIST

- with lamellar contact
- to order with pilot contact please add a "5" e.g.: 3355-6
- other versions on request

IP66/67

POWER
TWIST



CEE Sockets

Flanged sockets sloping IP44

- with screw terminals
- other versions on request

IP44

IP44/IP54 (16A 3p, 16A 5p, 32A 5p)



Amp.	Poles	110V~	230V~	400V~	>50V others
		50/60Hz	50/60Hz	50/60Hz	
		4h	3p=6h 4p+5p=9h	3p=9h 4p+5p=6h	1h
		Cat.No.	Cat.No.	Cat.No.	Cat.No.
flange: 80x97; fixing center 60x73					
16	3	413-4f8	413-6f8	413-9f8	413-1f8
16	4	414-4f8	414-9f8	414-6f8	414-1f8
16	5	415-4	415-9	415-6	415-1
32	3	423-4	423-6	423-9	423-1
32	4	424-4	424-9	424-6	424-1
32	5	425-4	425-9	425-6	425-1

Flanged sockets sloping IP44

TT

- screwless connection technology
- other versions on request

IP44

IP44/IP54 (16A 3p, 16A 5p, 32A 5p)



**TURBO
TERMINAL**

flange: 80x97; fixing center 60x73					
16	3	413-4TTf8	413-6TTf8	413-9TTf8	
16	4	414-4TTf8	414-9TTf8	414-6TTf8	
16	5	415-4TT	415-9TT	415-6TT	
32	3	423-4TT	423-6TT	423-9TT	
32	4	424-4TT	424-9TT	424-6TT	
32	5	425-4TT	425-9TT	425-6TT	

Flanged sockets sloping IP67

- with screw terminals
- other versions on request

IP67



flange: 80x97; fixing center 60x73					
16	3	4132-4f8	4132-6f8	4132-9f8	4132-1f8
16	4	4142-4f8	4142-9f8	4142-6f8	4142-1f8
16	5	4152-4f78	4152-9f78	4152-6f78	4152-1f78
32	3	4232-4f78	4232-6f78	4232-9f78	4232-1f78
32	4	4242-4f78	4242-9f78	4242-6f78	4242-1f78
32	5	4252-4f78	4252-9f78	4252-6f78	4252-1f78

Flanged sockets sloping IP67

POWER TWIST

- contact frame with screws
- other versions on request

IP66/67



**POWER
TWIST**

flange: 100x112; fixing center 80x88					
63	3	433-4	433-6	433-9	433-1
63	4	434-4	434-9	434-6	434-1
63	5	435-4	435-9	435-6	435-1
flange: 120x130; fixing center 100x108					
125	3	443-4	443-6	443-9	443-1
125	4	444-4	444-9	444-6	444-1
125	5	445-4	445-9	445-6	445-1

Motor protection plugs



CEE-Motor protection plug
contactor up to 15kW



Motor protection 230V
plug 1,5-16A



CEE-plug with switch
Designs:
On-/Off-switch
reversing switch
phase inverter
rotating field check
operating display



CEE-Motor protection plug
CEE-Motor protection plug PKZM0
IP44 or IP67
(available with and without holder)

Fields of application:

Pumps: Submerged pumps, mobile pumping, pumps for construction sites,...

Agitators: Mobile machines for mixing (building site machines)

Blowers: Ventilators, space ventilation,...

Compressors: Breathing air compressors, mobile compressors,...

Conveyors: Rolling and chain conveyors, band-conveyors,...

Construction machines: Circular saws, hand tools,...

Extractions: ventilation, smoke extraction,...

Industrial motors

CEE plugs and sockets 7-pole 16A and 32A, IP44/54 and IP66/67



Rubber plugs and connectors

TAURUS²
Der Schutzkontaktstecker

2x8 COLOR-VARIATIONS



- Austrian/German system
- with dual earthing system (Austrian/German and French/Belgian system)

Plug IP54



Rubber
(insert: PA6)
0511-sr
0521-sr



Solid rubber
(insert: TPE)
0512-sr
0522-sr

Angled plug IP44



Rubber
(insert: PA6)
05811-s

Solid rubber
(insert: TPE)
05812-s

TAURUS²
Der Schutzkontaktstecker

Connector IP20



Rubber
(insert: PA6)
2510-sr

Solid rubber
(insert: TPE)
2520-sr

- Austrian/German system
- Austrian/German system with shutter
- French/Belgian system
- French/Belgian system with shutter

2510-src

2410-sr

2410-src

Connector IP54



Rubber
(insert: PA6)
2511-sr

Solid rubber
(insert: TPE)
2521-sr

Rubber
(insert: PA6)
2512-sr

Solid rubber
(insert: TPE)
2522-sr

2511-src

2411-sr

2411-src

2512-src

2412-srw

2412-srcw

TOP TAURUS²
Der Schutzkontaktstecker



LED Connectors optionally with voltage indicator

6 COLOR-VARIATIONS

- with dual earthing system (Austrian/German and French/Belgian system)
- Austrian/German system
- French/Belgian system
- Austrian/German system with shutter
- French/Belgian system with shutter
- with LED indicator (Austrian/German system)
- with LED indicator (French/Belgian system)
- with shutter and LED indicator (Austrian/German system)
- with shutter and LED indicator (French/Belgian system)

Plug IP54



PA6
2K rubberized
05721-sr

Connector IP20



PA6
2K rubberized
25710-sr

Connector IP54



PA6
2K rubberized
25711-sr

PA6
2K rubberized
25712-sr

25710-src

25710-src

25730-sr

25730-src

25711-sr

24711-sr

25711-src

24711-src

24731-sr

25731-sr

25731-src

24731-src

25712-sr

24712-sr

25712-src

24712-src

24732-sr

25732-sr

25732-src

24732-sr

2-way connector IP44 with hinged lid



Polyamid (PA6)
25212-r

3-way connector IP44 with cap



Rubber
(insert: PA6)
253711-sr

Rubber
(insert: PA6)
253711-sr5

with 5-pole terminal

243711-sr5

243711-src5

- Austrian/German system
- Austrian/German system with shutter
- French/Belgian system
- French/Belgian system + shutter

25212-rc

24212-r

24212-rc

253711-src

243711-sr

243711-src

3-way connector IP44 with hinged lid



Rubber (TPE)
253822-sr

Rubber (TPE)
253822-sr5

with 5-pole terminal

253822-sr5



with LED indicator
253842-sr

Socket outlets

Watertight plug and connector IP66/68

NAUTILUS

also available in bronze-green

- **dual earthing system**
Austrian/German and French/Belgian system)
- **Austrian/German system**
- **French/Belgian system**



without shutter

with shutter

20251-b

20251-bc

20241-b

20241-bc

NAUTILUS

Watertight socket outlet IP66/68

- 16A, 3p (2P+E) with screw terminals
- rear connection
- also available in bronze-green

- **Austrian/German system**
with shutter
- **French/Belgian system**
with shutter



Flange 75x75mm
4-point fastening
with hinged lid

20352-8b
20352-8bc

20342-8b
20342-8bc



Flange 75x75mm
4-point fastening
with cover band

20351-8b
20351-8bc

20341-8b
20341-8bc




Flange oval
2-point fastening
with cover band

20351-9b
20351-9bc

20341-9b
20341-9bc

Socket outlet IP20

- 16A, 3p (2p+E) with screw terminals
- side connection
- *with shutter



Austrian/German system
DIN 49440

10584-0wsc*

French/Belgian system

10484-0ws

Socket outlet IP54

- 16A, 3p (2p+E), flange 50x50mm

Further colours for S-NOVA:



screw terminals	screwless connection technology	side connection	rear connection	shutter	sealing bulge*	Austrian/German system	French/Belgian system
✓		✓				1050-0bs	1040-0bs
✓		✓		✓		1050-0bsc	1040-0bsc
✓			✓	✓		1050-0b	1040-0b
✓			✓	✓		1050-0bc	1040-0bc
✓			✓		✓	1050-0bw	
	✓		✓			109-0b	108-0b
	✓		✓	✓		109-0bc	108-0bc
	✓		✓		✓	109-0bw	

* Plugs and socket outlets (DIN 49440) for portable use are subject to the standard DIN VDE 0620-1:2010 and ÖVE/ÖNORM EA 8684-2-2:2010

Flanged socket

- conforming to Italian, Danish, English, Australian and Swiss system
- Flange 50x50mm
- with screw terminals



Italian system
IP54

1036-0s



Danish system
IP54

1030-0b



British system
IP54

1020-5s



Australian system
IP54

1037-0s



Swiss system
IP55

1313-0bc (T13)
1323-0bc (T23)

Extra-low voltage

Plug IP44 TWIST

- with screw terminals
- nickel-plated contacts

IP44



Plug IP67 TWIST

- with screw terminals
- nickel-plated contacts

IP67



Connector IP44 TWIST

- with screw terminals
- nickel-plated contacts

IP44



Connector IP67 TWIST

- with screw terminals
- nickel-plated contacts

IP67



Amp.	Poles	24V~	42V~	24/42V~	24/42V~	24/42V~	24/42V~	24/42V=
		50/60Hz without Minor key	50/60Hz 12h	100-200Hz 4h	300Hz 2h	400Hz 3h	401-500Hz 11h	DC 10h
		Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	2	062v	082-12v	082-4v	082-2v	082-3v	082-11v	082-10v
16	3	063v	083-12v	083-4v	083-2v	083-3v	083-11v	083-10v
32	2	072v	092-12v	092-4v	092-2v	092-3v	092-11v	092-10v
32	3	073v	093-12v	093-4v	093-2v	093-3v	093-11v	093-10v

16	2	0622v	0822-12v	0822-4v	0822-2v	0822-3v	0822-11v	0822-10v
16	3	0632v	0832-12v	0832-4v	0832-2v	0832-3v	0832-11v	0832-10v
32	2	0722v	0922-12v	0922-4v	0922-2v	0922-3v	0922-11v	0922-10v
32	3	0732v	0932-12v	0932-4v	0932-2v	0932-3v	0932-11v	0932-10v

16	2	262v	282-12v	282-4v	282-2v	282-3v	282-11v	282-10v
16	3	263v	283-12v	283-4v	283-2v	283-3v	283-11v	283-10v
32	2	272v	292-12v	292-4v	292-2v	292-3v	292-11v	292-10v
32	3	273v	293-12v	293-4v	293-2v	293-3v	293-11v	293-10v

16	2	2622v	2822-12v	2822-4v	2822-2v	2822-3v	2822-11v	2822-10v
16	3	2632v	2832-12v	2832-4v	2832-2v	2832-3v	2832-11v	2832-10v
32	2	2722v	2922-12v	2922-4v	2922-2v	2922-3v	2922-11v	2922-10v
32	3	2732v	2932-12v	2932-4v	2932-2v	2932-3v	2932-11v	2932-10v

flange: 70x70; fixing center 56x56

16	2	362v	382-12v	382-4v	382-2v	382-3v	382-11v	382-10v
16	3	363v	383-12v	383-4v	383-2v	383-3v	383-11v	383-10v
32	2	372v	392-12v	392-4v	392-2v	392-3v	392-11v	392-10v
32	3	373v	393-12v	393-4v	393-2v	393-3v	393-11v	393-10v

Flanged socket straight IP44/54

- with screw terminals
- nickel-plated contacts

IP44/54



flange: 54x60; fixing center 44x44

16	2	3622f9v	3822-12f9v	3822-4f9v	3822-2f9v	3822-3f9v	3822-11f9v	3822-10f9v
16	3	3632f9v	3832-12f9v	3832-4f9v	3832-2f9v	3832-3f9v	3832-11f9v	3832-10f9v
32	2	3722f9v	3922-12f9v	3922-4f9v	3922-2f9v	3922-3f9v	3922-11f9v	3922-10f9v
32	3	3732f9v	3932-12f9v	3932-4f9v	3932-2f9v	3932-3f9v	3932-11f9v	3932-10f9v

Flanged socket straight IP66/67

- with screw terminals
- nickel-plated contacts

IP66/67



16	2	162v	182-12v	182-4v	182-2v	182-3v	182-11v	182-10v
16	3	163v	183-12v	183-4v	183-2v	183-3v	183-11v	183-10v
32	2	172v	192-12v	192-4v	192-2v	192-3v	192-11v	192-10v
32	3	173v	193-12v	193-4v	193-2v	193-3v	193-11v	193-10v

Wall socket IP44

- with screw terminals
- nickel-plated contacts
- top (M25) and rear entry

IP44




other versions and flange sizes on request!

Multiple-sockets outlet and adaptors

Multiple-socket outlet

Entry: 1 CEE-plug 16A 3p 230V
Outlet: 3 CEE-sockets 16A 3p 230V

- nickel-plated contacts
- other versions on request

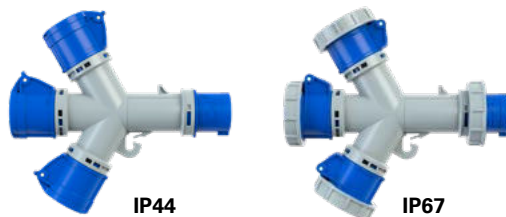


Amp.	Poles	Cat.No.	protection degree
16	3	9432000	IP44
16	3	9432001	IP67

Multiple-socket outlet with cable gland

Entry: 1 Twist cable gland
Outlet: 3 CEE-sockets 16A 3p 230V

- nickel-plated contacts
- other versions on request

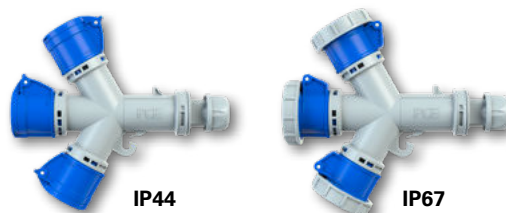

16	3	9432006	IP44
16	3	9432007	IP67

Adapter - CEE-plug 16A 3p / socket

Entry: 1 CEE-plug 16A 3p 230V
Outlet: 1 socket (DIN 49440) 16A 250V

- available also with French/Belgian, Danish and British sockets
- nickel-plated contacts



16	3	9433100	IP44
----	---	---------	------

Adapter - CEE-plug 16A 5p / socket

Entry: 1 CEE-Plug 16A 5p 400V
Outlet: 1 socket (DIN 49440) 16A 250V

- available also with French/Belgian, Danish and British sockets
- nickel-plated contacts



16	5	9433020	IP44
----	---	---------	------

USB charging socket 5V/2,1A (2x) with integrated power supply unit

- 2 pcs. USB type A sockets for simultaneous charging of 2 USB devices
- integrated electronic short circuit and overload protection
- input: 240V AC, 50/60Hz, 0,15A (ext. back-up fuse 6A characteristic B necessary)
- output voltage: 2x 5V DC
- rated current: per connector 2.1A- with integrated load management 2.1A max.
- Protection class: **IP54** (closed lid) / **IP20** (open lid)



U25050

IP54

Data socket with CAT 6_A RJ45 module

- housing material: PA6, colour: yellow
- incl. rubber seal with cable entry
- **IP54** splashproof (lid closed)
- CAT 6_A Keystone module, shielded, RJ45 to LSA stripes, tool free cable installation, colour coded acc. to EIA/TIA 568 A&B



Data socket with hinged lid (2x opening)
incl. 2xCAT 6_A RJ45 module

12k452-0e

IP54

Data socket with hinged lid (1x opening) empty (without module)

11om-0e

IP54

Module CAT 6_A RJ45

093617

Surface outlet with data socket

- Surface data socket 2xLAN with hinged lid
- 2x Cat 6A RJ45 Modul
- M25 cable gland (double 7mm)
- IP54 (lid closed without cable inserted cable)



white

86312k452

IP54

Switched interlocked sockets

Amp.	Poles	110V~	230V~	400V~	380V~
		50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50Hz 3h Container
		Cat.No.	Cat.No.	Cat.No.	Cat.No.
16	3	6013-4	6013-6	6013-9	
16	4	6014-4	6014-9	6014-6	
16	5	6015-4	6015-9	6015-6	
32	3	6023-4	6023-6	6023-9	
32	4	6024-4	6024-9	6024-6	
32	5	6025-4	6025-9	6025-6	

Switched interlocked socket - Compact series

- with screw terminals
- housing material: PA6
- nickel-plated contacts
- mechanical interlock

IP44/54



16	3	60132-4	60132-6	60132-9	
16	4	60142-4	60142-9	60142-6	
16	5	60152-4	60152-9	60152-6	
32	3	60232-4	60232-6	60232-9	
32	4	60242-4	60242-9	60242-6	60242-3
32	5	60252-4	60252-9	60252-6	

Switched interlocked socket - Compact series

- with screw terminals
- housing material: PA6
- nickel-plated contacts
- mechanical interlock

IP67



16	3	6113-4	6113-6	6113-9	
16	4	6114-4	6114-9	6114-6	
16	5	6115-4	6115-9	6115-6	
32	3	6123-4	6123-6	6123-9	
32	4	6124-4	6124-9	6124-6	
32	5	6125-4	6125-9	6125-6	

Switched interlocked socket - Compact series

- with screw terminals
- housing material: PA6 + PC/ABS
- nickel-plated contacts
- mechanical interlock
- rear entry

IP44/54



16	3	61132-4	61132-6	61132-9	
16	4	61142-4	61142-9	61142-6	
16	5	61152-4	61152-9	61152-6	
32	3	61232-4	61232-6	61232-9	
32	4	61242-4	61242-9	61242-6	61242-3
32	5	61252-4	61252-9	61252-6	

Switched interlocked socket - Compact series

- with screw terminals
- housing material: PA6 + PC/ABS
- nickel-plated contacts
- mechanical interlock
- rear entry

IP67



16	3	7513-4	7513-6	7513-9	
16	4	7514-4	7514-9	7514-6	
16	5	7515-4	7515-9	7515-6	
32	3	7523-4	7523-6	7523-9	
32	4	7524-4	7524-9	7524-6	
32	5	7525-4	7525-9	7525-6	

Switched interlocked socket

- with screw terminals
- housing material: PC/ABS
- nickel-plated contacts
- mechanical interlock
- top, bottom or rear entry

IP44/54



16	3	75132-4	75132-6	75132-9	
16	4	75142-4	75142-9	75142-6	
16	5	75152-4	75152-9	75152-6	
32	3	75232-4	75232-6	75232-9	
32	4	75242-4	75242-9	75242-6	75242-3
32	5	75252-4	75252-9	75252-6	

Switched interlocked socket

- with screw terminals
- housing material: PC/ABS
- nickel-plated contacts
- mechanical interlock
- top, bottom or rear entry

IP66/67



63	3	75332-4	75332-6	75332-9	
63	4	75342-4	75342-9	75342-6	
63	5	75352-4	75352-9	75352-6	

Switched interlocked socket

- with screw terminals
- housing material: PC/ABS
- brass with lamellar contact CuBe
- mechanical interlock
- top, bottom or rear entry
- housing can be rotated by 180°

IP66/67



125	3	9755090	9755102	9755091	
125	4	9755095	9755096	9755099	
125	5	9755104	9755105	9755100	

Switched interlocked socket

- WxHxD = 520x222x155mm
- with screw terminals
- housing material: PC/ABS
- brass with lamellar contact CuBe
- mechanical interlock
- top entry

IP67



Event technology

Safety plug

- with screwless cable gland
- dual-point earthing system
- insert: rubber



IP54 **TOPTAURUS** Die Schutzkontaktstecker

05721-ss

CEE Plug IP44/54

SHARK

- with screw terminals
- to order screwless connection technology please add "TT" e.g. 013-6TTx



IP44/IP54

Amp.

Poles

230V~

400V~

50/60Hz
3p=6h
4p+5p=9h

50/60Hz
3p=9h
4p+5p=6h

Cat.No.

Cat.No.

16

3

013-6x

16

4

014-6x

16

5

015-6x

32

3

023-6x

32

4

024-6x

32

5

025-6x

Safety connector

- with screwless cable gland
- national
- with hinged lid
- insert: rubber



IP54 **TOPTAURUS** Die Schutzkontaktstecker

25712-ss

CEE Plug IP66/67

POWER TWIST

- Contact frame with screws

IP66/67



63

3

033-6xs

63

4

034-6xs

63

5

035-6xs

125

3

043-6xs

125

4

044-6xs

125

5

045-6xs

3-way connector solid rubber

- with screwless cable gland
- national
- with hinged lid
- insert: rubber



IP44

253822-ss

with LED

253842-ss

CEE Flanged plug straight IP44

- with screw terminals
- to order screwless connection technology please add "TT" e.g. 613-6TTx



IP44

16

3

613-6x

16

4

614-6x

16

5

615-6x

32

3

623-6x

32

4

624-6x

32

5

625-6x

CEE Connector IP44/54

SHARK

- with screw terminals
- to order screwless connection technology please add "TT" e.g. 213-6TTx



IP44

16

3

213-6x

16

4

214-6x

16

5

215-6x

32

3

223-6x

32

4

224-6x

32

5

225-6x

CEE Connector IP66/67

POWER TWIST

- Contact frame with screws

IP66/67



63

3

233-6xs

63

4

234-6xs

63

5

235-6xs

125

3

243-6xs

125

4

244-6xs

125

5

245-6xs

CEE Flanged socket straight IP44

- with screw terminals
- to order screwless connection technology please add "TT" e.g. 313-6TTx



IP44

16

3

313-6x

16

4

314-6x

16

5

315-6x

32

3

323-6x

32

4

324-6x

32

5

325-6x

CEE Plug IP44/54

GRIP Midnight

- with screw terminals
- screwless connection technology



16

5

0153-6x

32

5

0253-6x

16

5

0153-6TTx

32

5

0253-6TTx

CEE Connector IP44/54

GRIP Midnight

- with screw terminals
- screwless connection technology



16

5

2153-6x

32

5

2253-6x

16

5

2153-6TTx

32

5

2253-6TTx

Socket outlet (DIN 49440)

- 2p+E, 16A 250V
- flange 50x50mm
- fixing center 38x38mm
- screwed contact
- available also with French/Belg. and British system



IP54  with sealing bulge

1050-0ss

1050-0ssw

T-Connect

- Equipment:
1 CEE-plug 16A 3p 6h
1 CEE-socket 16A 3p 6h
1 cable entry



IP44 (IP67 available)

other versions on request

94325000

Hinged windows

- available in different dimensions



IP67, IP54

Wall and mobile distribution boxes - solid rubber

- many designs available on request



Amp.	Poles	230V~	400V~
		50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h
		Cat.No.	Cat.No.
16 16	3 5	0132-6.u	0152-6.u
32 32	3 5	0232-6.u	0252-6.u
63 63 63	3 4 5	033-6.u	034-6.u 035-6.u
125 125 125	3 4 5	043-6.u	044-6.u 045-6.u
16 16	3 5	2132-6.u	2152-6.u
32 32	3 5	2232-6.u	2252-6.u
63 63 63	3 4 5	233-6.u	234-6.u 235-6.u
125 125 125	3 4 5	243-6.u	244-6.u 245-6.u
16 16	3 5	6132-6.u	6152-6.u
32 32	3 5	6232-6.u	6252-6.u
63 63 63	3 4 5	633-6.u	634-6.u 635-6.u
125 125 125	3 4 5	643-6.u	644-6.u 645-6.u
16 16	3 5	3132-6.u	3152-6.u
32 32	3 5	3232-6.u	3252-6.u
63 63 63	3 4 5	333-6.u	334-6.u 335-6.u
125 125 125	3 4 5	343-6.u	344-6.u 345-6.u

Camouflage (bronze-green)

CEE Plug **SHARK**

- with screw terminals
- contacts: brass



IP66/67

Watertight plug IP66/68

- with screw terminals
- nickel plated
- dual earthing system
- VG96926 standard on request



IP66/68

20051-u

CEE Plug **POWER TWIST**

- contact frame
- nickel-plated contacts
- with pilot contact



IP66/67

Watertight connector IP66/68

- with screw terminals
- VG96926 standard on request



IP66/68

Austrian/German system

20251-u

with shutter

20251-uc

French/Belgian system

20241-u

with shutter

20241-uc

CEE Connector **SHARK**

- with screw terminals
- contacts: brass



IP66/67

Watertight socket outlet IP66/68 (oval)

- with screw contact
- rear connection
- nickel plated contacts
- 2-point fastening
- VG96926 standard on request



IP66/68

Austrian/German system

20351-9u

with shutter

20351-9uc

French/Belgian system

20341-9u

with shutter

20341-9uc

CEE flanged plug straight

- with screw terminals
- contacts: brass



IP67

Watertight socket outlet IP66/68 (75x75mm)

- with screw contact
- with cover band
- nickel plated contacts
- 4-point fastening
- VG96926 standard on request



IP66/68

Austrian/German system

20351-8u

with shutter

20351-8uc

French/Belgian system

20341-8u

with shutter

20341-8uc

CEE fanged plug straight **POWER TWIST**

- contact frame with screws
- nickel-plated contacts
- with pilot contact



IP66/67

CEE flanged socket straight

- with screw terminals
- contacts: brass



IP67

Watertight socket outlet IP66/68 (75x75mm)

- with screw contact
- with hinged lid
- nickel plated contacts
- 4-point fastening
- VG96926 standard on request



IP66/68

Austrian/German system

20352-8u

with shutter

20352-8uc

French/Belgian system

20342-8u

with shutter

20342-8uc

CEE flanged socket straight **POWER TWIST**

- contact frame with screws
- contacts: brass with lamellar spring (CuBe)



IP66/67




Thermoplastic insulated distribution boxes - mobile



Series IMST IP44

- Handy, robust, mobile distribution box made of shock-resistant polyamide
- Socket outlet combination acc. EN 61439 or EN 60309
- Dimensions: HxWxD = 200x197x197 mm
- Max. rated current of 32A
- Up to 7 sockets
- 8 modules under window
- Stackable
- Ready wired for connection






Layout	CEE 400V 5p		SS 250V	Protection		Connection	InA RDF	Cat.No.
	32A	16A	16A	RCD	MCB			
		2	4			1 x CEE-flanged plug 16A 5p 400V	VS max. 16A	9030010 
		2	5	1 x RCD 40A/4/0.03A (TYP A 25AT)	2 x MCB 16A 1p-C	2m cable H07RN-F 5G2,5 with plug 16A 5p 400V	InA 16A RDF 0,7	9030204 
	1	1	3	1 x RCD 63A/4/0.03A (TYP A 40AT)	1 x MCB 16A 3p-C 1 x MCB 16A 1p-C	2m cable H07RN-F 5G4 with plug 32A 5p 400V	InA 32A RDF 0,5	9030117 



Series ISCHL IP44

- Handy, robust, mobile distribution box made of shock-resistant polyamide
- Socket outlet combination acc. EN 61439 or EN 60309
- Dimensions: HxWxD = 200x300x200 mm
- Max. rated current of 32A
- Up to 10 sockets (inlet plug + 8 sockets or cable with plug + 9 sockets)
- Up to 13 modules under window
- Stackable
- Ready wired for connection



Layout	CEE 400V 5p		SS 250V	Protection		Connection	InA RDF	Cat.No.
	32A	16A	16A	RCD	MCB			
		3	6			2m cable H07RN-F 5G2,5 with plug 16A 5p 400V	VS max. 16A	9130005
		3	6	1 x RCD 40A/4/0.03A (TYP A 25AT)		2m cable H07RN-F 5G2,5 with plug 16A 5p 400V	InA 16A RDF 0,6	9130006
	1	2	6	1 x RCD 63A/4/0.03A (TYP A 40AT)	2 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with plug 32A 5p 400V	InA 32A RDF 0,6	9130008 

Layout examples: (other combinations on request!)

 ... available on stock!

Thermoplastic insulated distribution boxes

Series PEGASUS IP44

- Socket outlet combination acc. EN 61439
- Handy, robust, mobile distribution box made of shock-resistant polyamide
- Dimensions: HxWxD = 230x140x140 mm
- Maximum rated current of 32A
- Max. 6 mounting surfaces
- 4 modules under window
- With plastic carrying handle
- Ready wired for connection



Layout	CEE 400V 5p		SS 250V	Protection		Connection	InA RDF	Cat.No.
	32A	16A	16A	RCD	MCB			
		1	3			2m cable H07RN-F 5G2,5 with plug 16A 5p 400V	VS max.16A	9034004
			4			2m cable H07RN-F 5G2,5 with plug 16A 5p 400V	VS max.16A	9034006
	1	1	2		1 x MCB 16A 3p-C 1 x MCB 16A 1p-C	2m cable H07RN-F 5G2,5 with plug 16A 5p 400V	InA 32A RDF 0,5	9034030

Hanging distribution box

Series PEGASUS IP44

- Handy, robust and compact distribution box made of shock-resistant polyamide
- Dimensions: HxWxD = 220x140x140 mm
- With 4 ring bolts for ceiling fastening
- Maximum rated current of 32A
- Max. 6 mounting surfaces
- 4 modules under window
- Ready wired for connection
- With ergonomic anchor handle on the bottom of the housing



suspension kit
(L = 300mm)

9033-1

Layout	CEE 400V 5p		SS 250V	Protection		Connection	InA RDF	Cat.No.
	32A	16A	16A	RCD	MCB			
		1	3			1x M25 (ø13-18mm) top 1 x VC-terminal 5p	max.16A	9033005 
			4			1x M20 (ø10-14mm) top 1x VC-terminal 3p	max.16A	9033008 
		1	2			1x M25 (ø13-18mm) top 1x M20 (ø6-12mm) top 1x VC-terminal 5p CAT6 RJ45 double and mounting set (order separate)	max.16A	9033550 + 12k452-0e 9033-CATmont

Thermoplastic insulated distribution boxes - wall mounting

- Socket outlet combination acc. EN 61439
- Housing made of high durable PC/ABS, compact design
- Ready wired for connection
- Wall mounting is possible in- or outside the protective area.
- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Standard version: opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel-plated, sockets individually exchangeable



Series SÖLDEN IP54

- Dimensions: HxWxD = 520x297x165 mm
- up to 2x14 modules

CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
63A	32A	16A	16A	RCD	MCB			
	1	2	9	1x RCD 63A/4/0.03A (TYP A 63AT)	1x MCB 32A 3p-C 2x MCB 16A 3p-C 9x MCB 16A 1p-C	1x M40 (hole) top, 1x M40 (blind cap) bottom	InA 63A RDF 0,5	9028883
1	1	2	3	1x RCD 63A/4/0.03A (TYP A 63AT)	1x MCB 32A 3p-C 1x MCB 16A 3p-C 3x MCB 16A 1p-C	1x M40 (hole) top, 1x M40 (blind cap) bottom	InA 63A RDF 0,4	9029074



Series STROBL IP54

- Dimensions: HxWxD = 520x222x140
- up to 2x10 modules

CEE 400V 5p		SS 250V	Protection		Connection	InA RDF	Cat.No.
32A	16A	16A	RCD	MCB			
1	1	3	1 x RCD 63A/4/0.03A (TYP A 40AT)	1 x MCB 32A 3p-C 1 x MCB 16A 3p-C 3 x MCB 16A 1p-C	1x M32 (hole) top, 1x M32 (blind cap) bottom	InA 40A RDF 0,6	9025575
1	2	4	1 x RCD 63A/4/0.03A (TYP A 40AT)	1 x MCB 32A 3p-C 2 x MCB 16A 3p-C 4 x MCB 16A 1p-C	1x M32 (hole) top, 1x M32 (blind cap) bottom	InA 40A RDF 0,4	9025231



Series ANIF7 IP54

- Dimensions: HxWxD = 320x222x140 mm
- up to 10 modules

CEE 400V 5p		SS 250V	Protection		Connection	InA RDF	Cat.No.
32A	16A	16A	RCD	MCB			
	2	2		2 x MCB 16A 3p-C 2 x MCB 16A 1p-B	1x M32 (hole) top, 1x M32 (blind cap) bottom	InA 32A RDF 0,6	9135123
1	1	3	1 x RCD 63A/4/0.03A (TYP A 40AT)	1 x MCB 16A 3p-C 3 x MCB 16A 1p-C	1x M32 cable gland (ø18-25mm) top 1x M32 (blind cap) bottom	InA 32A RDF 0,5	9135510



Series LOFER7 IP54

- Dimensions: HxWxD = 255x204x140 mm
- up to 9 modules

CEE 400V 5p		SS 250V	Protection		Connection	InA RDF	Cat.No.
32A	16A	16A	RCD	MCB			
	1	2	1 x RCD 40A/4/0.03A (TYP A 25AT)	1 x MCB 16A 3p-C 2 x MCB 16A 1p-B	1 x M25 (hole) top, 1 x M25 (blind cap) bottom	InA 25A RDF 0,8	9018112
1	1			1 x MCB 16A 3p-C	1 x M25 (hole) top, 1 x M25 (blind cap) bottom	InA 32A RDF 0,6	9018088

Layout examples: (other combinations on request!)

... available on stock!

Solid-rubber distribution boxes - wall mounting

Series BRUCK IP54

- Socket outlet combination acc. EN 61439
- Solid rubber enclosing with protective roof (optional without roof)
- Dimensions: HxWxD = 370x370x203 mm
- Front cover made out of plastics (black), hinged to housing
- Window for up to max. 18 modules
- Ready wired for connection

Standard version:

- TOP-mounting up to 17 modules - all switchgear and sockets mounted on front cover for easy fixation of the housing to the wall
- BOTTOM-mounting up to 18 modules- all switchgear mounted on the housing
- Protective insulation via 4-way wall fastening outside of wiring space
- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window (opening angle >180°)
- Cable gland IP68 selective on top or bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individually exchangeable



Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
		2	2	4	1 x RCD 63A/4/0.03A (TYP A 63AT)	2x MCB 32A 3p-C 1x MCB 16A 3p-C 4x MCB 16A 1p-B	1 x M32 (ø18-25mm) top 1 x M32 (blind cap) bottom	InA 63A RDF 0,4	92403375
	1	1	1	4	1 x RCD 63A/4/0.03A (TYP A 63AT)	1x MCB 32A 3p-C 1x MCB 16A 3p-C 2x MCB 16A 1p-C	1 x M40 (ø22-32mm) top 1 x M40 (blind cap) bottom	InA 63A RDF 0,4	92402427

Series SALZBURG IP54

- Socket outlet combination acc. EN 61439
- Solid rubber enclosing with protective roof (optional without roof)
- Dimensions: HxWxD = 370x298x203 mm
- Front cover made out of plastics (black), hinged to housing
- Window for up to max. 14 modules
- Ready wired for connection

Standardausführung:

- TOP-mounting up to 13 modules - all switchgear and sockets mounted on front cover for easy fixation of the housing to the wall
- BOTTOM-mounting up to 14 modules- all switchgear mounted on the housing
- Protective insulation via 4-way wall fastening outside of wiring space
- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window (opening angle >180°)
- Cable gland IP68 selective on top or bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individually exchangeable



Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
		1	1	4		1x MCB 32A 3p-C 1x MCB 16A 3p-C 4x MCB 16A 1p-C	1 x M32 (ø18-25mm) top, 1 x M32 (blind cap) bottom	InA 40A RDF 0,5	92272488
		1	1	3	1x RCD 63A/4/0.03A (TYP A 40AT)	1x MCB 32A 3p-C 1x MCB 16A 3p-C 3x MCB 16A 1p-B	1 x M32 (ø18-25mm) top, 1 x M32 (blind cap) bottom	InA 40A RDF 0,6	92272001

Layout examples: (other combinations on request!)

... available on stock!

Solid-rubber distribution boxes - wall mounting

Series EISENSTADT IP54

- Solid rubber enclosure
- Dimensions: HxWxD = 145x145x105 mm
- Ready wired for connection
- All outer metal parts made out of stainless steel, captive screws
- Cable gland IP68 on top



Layout	CEE 400V 5p		SS 250V	Protection	Connection	VS	Cat.No.
	32A	16A	16A				
			2		1x terminal 3p 10mm ² 1x M20 (ø10-14mm) top	max. 16A	9849030
		1	2		1x terminal 5p 10mm ² 1x M20 (ø10-14mm) top	max. 16A	9849050



mounted on wall mounting plate (stainless steel):

	1		2	2x MCB 16A 1p-C	1x terminal 5p 10mm ² 1x M25 (ø13-18mm) top	max. 32A	9849185
		1	2	1x MCB 16A 3p-C 1x MCB 16A 1p-C	1x connection directly to MCB and VC terminal (N+PE) 1x M25 (ø13-18mm) top	max. 32A	9849186

Hanging distribution box

Series EISENSTADT IP54

- Sturdy hanging distribution box made of solid rubber
- Dimensions: HxWxD= 145x145x105 mm
- With 4x eye screws
- Hook handle at the bottom
- Ready wired on Vario terminals
- All outer metal parts made out of stainless steel, captive screws
- Cable gland IP68 on top

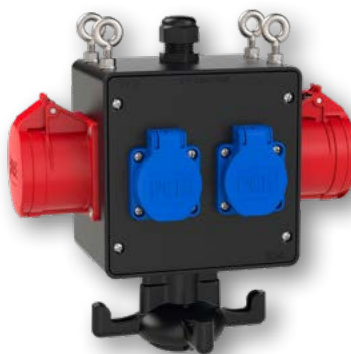

9033-1

Layout	CEE 400V 5p		SS 250V	Protection	Connection	VS	Cat.No.
	32A	16A	16A				
 IP67		1	2		1x terminal 5p 10mm ² 1x M25 (ø13-18mm) top	max. 16A	9849203
		2	2		1x terminal 5p 10mm ² 1x M20 (ø10-14mm) top	max. 16A	9849250
			4		1x terminal 3p 10mm ² 1x M20 (ø10-14mm) top	max. 16A	9849263



Layout examples: (other combinations on request!)

Solid-rubber distribution boxes - mobile

Series SPITZ IP54

- Portable solid rubber distribution box
- Socket outlet combination acc. EN 61439
- Dimensions: HxWxD = 320x320x320 mm
- Fuses, control devices e.g. MCB, RCD, current indicator,... under top cover
- Lifting hinged top cover with 2 quick acting closures
- Maximum safety- closed casing bottom with high ground clearance
- Space-saving storage- distributors are stackable





Layout	CEE 400V 5p		SS 250V	Protection		Connection	InA RDF	Cat.No.
	32A	16A	16A	RCD	MCB			
	1	2	3	1 x RCD 63A/4/0,03A (TYP A 63AT)	1 x MCB 32A 3p-C 2 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G16 with CEE-plug 63A 5p 400V	InA 63A RDF 0,6	94741511 
	2	2	4	1 x RCD 63A/4/0,03A (TYP A 40AT)	1 x MCB 16A 3p-C 4 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,4	94741386 

Series RIED IP54

- Socket outlet combination acc. EN 61439
- Dimensions: HxWxD = 280x235x285 mm
- Fuses, control devices e.g. MCB, RCD, current indicator,... under top cover
- Lifting hinged top cover with 1 quick acting closure
- Maximum safety- closed casing bottom with high ground clearance
- Space-saving storage- distributors are stackable



Layout	CEE 400V 5p		SS 250V	Protection		Connection	InA RDF	Cat.No.
	32A	16A	16A	RCD	MCB			
	1	2	3	1 x RCD 63A/4/0.03A (TYP A 40AT)	1 x MCB 16A 3p-C 3 x MCB 16A 1p-C	2m cable H07RN-F 5G6 with CEE-plug 32A 5p 400V	InA 32A RDF 0,5	9473080
		2	4	1 x RCD 63A/4/0.03A (TYP A 40AT)	1 x MCB 16A 3p-C 2 x MCB 16A 1p-C	1xCEE-wall mounted plug 32A 5p 400V (IP44)	InA 32A RDF 0,5	9473435

Series STEYREGG IP54

- Socket outlet combination acc. EN 61439 or EN 60309
- Dimensions: HxWxD = 79x430x129 mm
- With or without fuse protection
- Ready wired for use



Layout	CEE 400V 5p		SS 250V	Protection		Connection	VS InA RDF	Cat.No.
	32A	16A	16A	RCD	MCB			
		1	3	1 x RCD 40A/4/0.03A (TYP A 25AT)		2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V	InA 16A RDF 0,8	9441051
		2	3			2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V	VS max.16A	9441151 

Layout examples: (other combinations on request!)

 ... available on stock!

Series ST. ANTON


Compact distribution boxes

PCE compact distribution boxes are designed to be safe, reliable and easy-to-use. Every product has been manufactured to the highest quality standards (ISO 9001) and is available tailor made in size and equipment to your individual specification. The wide variety of product features guarantees maximum flexibility in use.

- compact shape made of shock-resistant polyamide
- space saving storage- ergonomic design
- with shackle (optional: without shackle)
- ready wired for connection
- IP44 splashproof
- well adapted for industry




9430412



Entry	Outlet	Cat.No.
 3 x safety sockets 16A 250V with self-closing lid	M20 cable gland without cable	9430406
	1,5m H07RN-F 3G1,5 with safety plug (rubber) 16A 250V 	9430409
	1,5m H07RN-F 5G1,5 with CEE-plug 16A 5p 400V 	9430429
	1 x CEE-flanged plug 16A 5p 400V 	9430412



9430402



Entry	Outlet	Cat.No.
 1 x CEE-socket 16A 5p 400V 2 x safety sockets 16A 250V with self-closing lid	1 x CEE-flanged plug 16A 5p 400V 	9430402
	1 x CEE-phase inverter flanged plug 16A 5p 400V 	9430452
	1,5m H07RN-F 5G1,5 with CEE-plug 16A 5p 400V	9430715
	1,5m H07RN-F 5G1,5 with CEE-phase inverter plug 16A 5p 400V	9430719



9437413

Series ST. ANTON 4f

Entry	Outlet	Cat.No.
 3 x CEE-sockets 32A 5p 6h 400V	1,5m H07RN-F 5G4 with CEE-plug 32A 5p 6h 400V 	9437113
	1 CEE-flanged plug 32A 5p 6h 400V 	9437413
	1,5m H07RN-F 5G4 with CEE-phase inverter plug 400V	9437114
	1 CEE-flanged plug phase inverter 32A 5p 400V	9437454



9439006

Series ST.ANTON 6F

Compact distribution boxes

- Up to 6 sockets (flanged plug or cable + 5 sockets)
- 4 modules under window
- Optional: meter, timer or switches (e.g. emergency stop)



9438413

Protection	Outlet	Connection	Cat.No.
1 x MCB 16A 3p-C 1 x MCB 16A 1p-C	 1 CEE-socket 16A 5p 400V 2 safety socket 16A 250V	2m cable H07RN-F 5G6 with plug 32A 5p 400V	9439006
	 5 CEE-socket 32A 5p 400V	1 x CEE-flanged pg 32A 5p 400V	9438413

Layout examples: (other combinations on request!)

 ... available on stock!

COMBO-POL Wall sockets IP44

Amp.	Poles	switch	Austr./Germ.	French/Belg.
16	3	0-1	96061350	
16	4	0-1	96061450	
16	5	0-1	96061550	
32	3	0-1	96062350	
32	4	0-1	96062450	
32	5	0-1	96062550	
16	4	L-O-R	960614501	
16	5	L-O-R	960615501	
32	4	L-O-R	960624501	
32	5	L-O-R	960625501	

Wall socket COMBO-POL with switch 1x CEE flanged socket

- CEE 16A 3p to 32A 5p
- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- ready wired on terminal



16	3	0-1	96061351	96061341
16	4	0-1	96061451	96061441
16	5	0-1	96061551	96061541
32	3	0-1	96062351	96062341
32	4	0-1	96062451	96062441
32	5	0-1	96062551	96062541

Wall socket COMBO-POL with switch 1x CEE flanged socket + 1x safety socket

- CEE 16A 3p to 32A 5p with 1 safety socket 16A 250V
- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- 32A: the safety socket is protected by fuse (10A slow)
- ready wired on terminal



16	3	0-1	96061352	96061342
16	4	0-1	96061452	96061442
16	5	0-1	96061552	96061542
32	3	0-1	96062352	96062342
32	4	0-1	96062452	96062442
32	5	0-1	96062552	96062542

Wall socket COMBO-POL with switch 1x CEE flanged socket + 2x safety sockets

- CEE 16A 3p to 32A 5p with 2 safety sockets 16A 250V
- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- 32A: the safety socket is protected by fuse (10A slow)
- ready wired on terminal



COMBO-POL2 Wall sockets IP44

16	3		16081352	16081342
16	4		16081452	16081442
16	5		16081552	16081542
32	3		16082352	16082342
32	4		16082452	16082442
32	5		16082552	16082542

Wall socket COMBO-POL2 1x CEE flanged socket + 2x safety sockets

- CEE 16A 3p to 32A 5p with 2 safety sockets 16A 250V
- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- 32A: the safety socket is protected by fuse (10A slow)
- ready wired on terminal



16	3	0-1	160813521	160813421
16	4	0-1	160814521	160814421
16	5	0-1	160815521	160815421
32	3	0-1	160823521	160823421
32	4	0-1	160824521	160824421
32	5	0-1	160825521	160825421

Wall socket COMBO-POL2 with switch 1x CEE flanged socket + 2x safety sockets

- CEE 16A 3p to 32A 5p with 2 safety sockets 16A 250V
- with switch (ON/OFF) AC22A
- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- 32A: the safety socket is protected by fuse (10A slow)
- ready wired on terminal



PV-BOX DC

Lightning and surge protection for photovoltaic systems

Lightning/surge arrester

Type 1+2 (class I + II)

Surge arrester

Type 2 (class II)



PV-BOX DC1-TYPE 1+2

Complete solution type 1+2 for PV-systems with 1 MPP-tracker, 1000V DC

1x Lightning/surge arrester Typ 1+2
(Brand: Phoenix Contact)

PV-connectors

090PV005

Cable gland M16

090PV027

PV-BOX DC1-TYPE 2

Complete solution type 2 for PV-systems with 1 MPP-tracker, 1000V DC

1x Surge arrester Type 2
(Brand: Phoenix Contact)

PV-connectors

090PV010

Cable gland M16

090PV030

- Plastic enclosure with transparent window for 8 units
- Number of MPP-tracker: 1 / number of strings: 1
- 4x PV-connectors or 4x cable gland M16
- 2x cable gland M16 for earth connection
- ready wired (only with PV-connectors)



PV-BOX DC2-TYPE 1+2

Complete solution type 1+2 for PV-systems with 2 MPP-tracker, 1000V DC

2x Lightning/surge arrester Typ 1+2
(Brand: Phoenix Contact)

PV-connectors

090PV004

Cable gland M16

090PV028

PV-BOX DC2-TYPE 2

Complete solution type 2 for PV-systems with 2 MPP-tracker, 1000V DC

2x Surge arrester Type 2
(Brand: Phoenix Contact)

PV-connectors

090PV009

Cable gland M16

090PV031

- Plastic enclosure with transparent window for 8 units
- Number of MPP-tracker: 2 / number of strings: 1
- 8x PV-connectors or 8x cable gland M16
- 2x cable gland M16 for earth connection
- ready wired (only with PV-connectors)



PV-BOX DC2-TYPE 1+2 with string fuse D01

Complete solution type 1+2 for PV-systems with 2 MPP-tracker, 1000V DC

2x Lightning/surge arrester Typ 1+2
(Brand: Phoenix Contact)

PV-connectors

090PV001

Cable gland M16

090PV029

PV-BOX DC2-TYPE 2 with string fuse D01

Complete solution type 2 for PV-systems with 2 MPP-tracker, 1000V DC

2x Surge arrester Type 2
(Brand: Phoenix Contact)

PV-connectors

090PV006

Cable gland M16

090PV032

- Plastic enclosure with transparent window for 12 units
- Number of MPP-tracker: 2 / number of strings: 1
- 4x fuse inserts 16A gPV 1000V DC (Brand: Phoenix Contact)
- 8x PV-connectors or 8x cable gland M16
- 2x cable gland M16 for earth connection
- ready wired (only with PV-connectors)

Series FLEX

Thermoplastic insulated enclosure

Maximum flexibility ...



Various accessories available!

FLEX 6-E

- Dims: HxWxD = 471x160x132mm
- bottom part of housing with mounted mounting rail for max. 6 modules
- closed top part of housing with mounted hinged window
- 2x hinge strap with screws
- 2x screw cover



15850600

FLEX 6-S3

- Dims: HxWxD = 471x160x132mm
- bottom part of housing with mounted mounting rail for max. 6 modules
- top part of housing with mounted hinged window and 3 cut-outs for flanged sockets (80x97mm)
- 1x blind flange with seal
- 12x flange screws
- 2x hinge strap with screws
- 2x screw cover



15850603

FLEX 10-E

- Dims: HxWxD = 471x230x158mm
- bottom part of housing with mounted mounting rail for max. 10 modules
- closed top part of housing with mounted hinged window
- 2x hinge strap with screws
- 4x screw cover



15851000

FLEX 10-S4

- Dims: HxWxD = 471x230x158mm
- bottom part of housing with mounted mounting rail for max. 10 modules
- top part of housing with mounted hinged window and 4 cut-outs for flanged sockets (80x97mm)
- 1x blind flange with seal
- 16x flange screws
- 2x hinge strap with screws
- 4x screw cover



15851004

FLEX 16-E

- Dims: HxWxD = 471x330x158mm
- bottom part of housing with mounted mounting rail for max. 16 modules
- closed top part of housing with mounted hinged window
- 2x hinge strap with screws
- 4x screw cover



15851600

FLEX 16-S6

- Dims: HxWxD = 471x330x158mm
- bottom part of housing with mounted mounting rail for max. 16 modules
- top part of housing with mounted hinged window and 6 cut-outs for flanged sockets (80x97mm)
- 1x blind flange with seal
- 24x flange screws
- 2x hinge strap with screws
- 4x screw cover



15851606

CEE diagnostic plug with LED display

The practical helper for all electricians in industry, craft and on construction sites! **IP20**

Multiple display- and diagnostic functions:

- Rotary field check
- Phase conductor check
- Neutral conductor check
- Protective earth conductor check

Cat.No.

16A CEE-plug with LED display

9434152

32A CEE-plug with LED display

9434252

Only for temporary testing period allowed! (not for permanent use)



CEE current measurement plug

Rotation field check (optional), **IP44**

16A (L1-L2-L3)

- Current measurement: L1 / L2 / L3 with clamp meter*

without rotation field check

with rotation field check

Cat.No.

9434150

9434151

32A (L1-L2-L3-N-PE)

- Current measurement: L1 / L2 / L3 / N / PE with clamp meter*

without rotation field check

with rotation field check

9434250

9434251

*Clamp meter not included. Only for temporary testing!



PRCD-S safety protection devices with comprehensive personal protection

available from
Q3/2026



PRCD-S Mobile personal protection device IP55

- Cable inline version **PRCD-S** 16A 230V~ 30mA
- for direct use inline with connection cords

with cable grommet

4690113550

with cable gland and anti-kink sleeve

4691113550



PRCD-S Safety extension cord IP54

- 3m H07RN-F 3G1,5
- with mobile personal protection device **PRCD-S** 16A 230V~ 30mA
- mounted TopTaurus2 rubber safety plug and rubber safety connector 16A 250V~

with cable grommet

4690001

with cable gland and anti-kink sleeve

4691001



PRCD-S Safety extension cord IP55

- 3m H07RN-F 3G2,5
- with mobile personal protection device **PRCD-S** 16A 230V~ 30mA with cable gland and anti-kink sleeve
- mounted **NAUTILUS** safety plug IP68 and **NAUTILUS** safety connector IP68 16A 250V~, each with anti-kink sleeve

4691015



PRCD-S Safety extension cord with 3-way connector IP54

- 3m H07RN-F 3G1,5
- with mobile personal protection device **PRCD-S** 16A 230V~ 30mA with cable gland and anti-kink sleeve
- mounted TopTaurus2 rubber safety plug and rubber **3-way** connector 16A 250V~ with anti-kink sleeve

4691002



PRCD-S Safety cable reel XREEL®250 IP54

- 25m H07RN-F 3G1,5 or 3G2,5
- with mobile personal protection device **PRCD-S** 16A 230V~ 30mA with cable gland and anti-kink sleeve
- 3x safety sockets (individually replaceable) with sealing bulge and self closing hinged lid 16A 250V, thermo protection switch and TopTaurus2 rubber safety plug (dual earthing system)

3G1,5 9250100-p

3G2,5 9250101-p



PRCD-S Safety cable reel XREEL®310 IP54

- 40m H07RN-F 3G2,5
- with mobile personal protection device **PRCD-S** 16A 230V~ 30mA with cable gland and anti-kink sleeve
- 4x safety sockets (individually replaceable) with sealing bulge and self closing hinged lid 16A 250V, thermo protection switch, power indicator light and TopTaurus2 rubber safety plug (dual earthing system)

9350100-p

PRCD-S+ and PRCD-K+ Mobile personal protection devices

PRCD-S+ Mobile personal protection device

- for direct use inline with connection cords
- Cable inline version **PRCD-S+** 16A 30mA IP55

Cat.No.

967011355



PRCD-S+ Safety extension cord IP44

- 3m H07RN-F 3G1,5
- with mobile personal protection device **PRCD-S+** 16A 230V~ 30mA
- mounted rubber safety plug and rubber safety connector 16A 250V~

4670001



PRCD-S+ Safety extension cord with 3-way connector IP44

- 3m H07RN-F 3G1,5
- with mobile personal protection device **PRCD-S+** 16A 230V~ 30mA
- mounted rubber safety plug and rubber 3-way connector 16A 250V~

4670002



PRCD-S+ Safety cable reel XREEL®250

- 25m H07RN-F 3G1,5
- 3x safety sockets (individually replaceable) with sealing bulge and self closing hinged lid 16A 250V, thermo protection switch and rubber safety plug (dual earthing system).
- Including mobile personal protection device **PRCD-S+** 16A 250V~ 30mA, IP44

9250027-p



PRCD-S+ Safety cable reel XREEL®310

- 40m H07RN-F 3G2,5
- 4x safety sockets (individually replaceable) with sealing bulge and self closing hinged lid 16A 250V, thermo protection switch, power indicator light and rubber safety plug (dual earthing system).
- Including mobile personal protection device **PRCD-S+** 16A 250V~ 30mA, IP44

9350001-p



PRCD-K+ Personal protection device for IT power grids

- for direct use inline with connection cords
- Cable inline version **PRCD-K+** 16A 30mA IP55

968011355



PRCD-K+ Personal protection device for IT power grids

- 3m H07RN-F 3G1,5
- with mobile personal protection device **PRCD-K+** 16A 230V~ 30mA
- mounted rubber safety plug and rubber safety connector 16A 250V~

4680001



Carrying case

Robust, stackable carrying case made of polypropylen for perfect storage and carrying of your **PRCD-S+** safety device or any other equipment.
outside dimensions: 388 x 388 x 110 mm (WxHxD)
inside dimensions: 370 x 295 x 100 mm (WxHxD)

000256



XREEL® Cable reel

Cable reel made of special plastics

Stable carrying rack with ergonomic handle made of extremely durable plastic, central brake mechanism as well as 2 parking positions for the plug. Available in 2 dimensions.



XREEL® 250



Equipment:

- 4 x safety sockets with shutter 16A 250V
- Thermal protection, power indicator light and safety plug (rubber) with dual earthing system

■ cable color black ■ cable color orange

IP20

Cable type	Cable length	Cat.No.
H05RR-F 3G1,5 Rubber sheathed cable	25m	9250005-p
H05VV-F 3G1,5 PVC-sheathed cable	25m	9250002-p



Equipment:

- 4 x safety sockets with shutter, sealing bulge and self closing hinged lid 16A 250V
- Thermal protection, power indicator light and safety plug (rubber) with dual earthing system

IP54

Cable type	Cable length	Cat.No.
H05RR-F 3G1,5 Rubber sheathed cable	25m	9250006-p
H05VV-F 3G1,5 PVC-sheathed cable	25m	9250004-p
H05RR-F 3G1,5 Rubber sheathed cable	25m	9250007-p*



Equipment:

- 3 x safety sockets (individual exchangeable), sealing bulge and self closing hinged lid 16A 250V
- Thermal protection and safety plug (solid rubber) with dual earthing system

IP54

Cable type	Cable length	Cat.No.
H07RN-F 3G1,5 Rubber sheathed cable K2	25m	9250012-p
H07RN-F 3G1,5 Rubber sheathed cable K2	33m	9250022-p
H05RR-F 3G2,5 Rubber sheathed cable K2	25m	9250034-p
H05RR-F 3G1,5 Rubber sheathed cable	25m	9250001-p*
H07BQ-F 3G1,5 Polyurethane cable K2	25m	9250010-p
H07BQ-F 3G1,5 Polyurethane cable K2	30m	9250033-p
H07BQ-F 3G1,5 Polyurethane cable K2	33m	9250026-p
H07BQ-F 3G2,5 Polyurethane cable K2	25m	9250018-p



Empty reel

with crank, cable entry and strain relief

Description	Best.Nr.
Empty reel (without central panel), colour: black	9250998-p
Central panel 4xSSD 4x safety socket IP54 incl. thermal protection and operation display, ready wired on main terminal	925004
Central panel 3xSSD 3x safety socket IP54 individually replaceable, incl. thermal protection, ready wired on main terminal	925006

XREEL® 310

Equipment:

- 4 x safety sockets (individual exchangeable), sealing bulge and self closing hinged lid 16A 250V
- Thermal protection, power indicator light and safety plug (solid rubber) with dual earthing system

■ cable color black ■ cable color orange

IP54

Cable type	Cable length	Cat.No.
H07BQ-F 3G1,5 Polyurethane cable K2 ■	25m	9350145-p
H07BQ-F 3G1,5 Polyurethane cable K2 ■	30m	9350147-p
H07BQ-F 3G1,5 Polyurethane cable K2 ■	40m	9350146-p
H07BQ-F 3G1,5 Polyurethane cable K2 ■	50m	9350151-p
H07BQ-F 3G2,5 Polyurethane cable K2 ■	25m	9350159-p
H07BQ-F 3G2,5 Polyurethane cable K2 ■	30m	9350196-p
H07BQ-F 3G2,5 Polyurethane cable K2 ■	40m	9350162-p
H07BQ-F 3G2,5 Polyurethane cable K2 ■	50m	9350009-p
H07RN-F 3G1,5 Rubber sheathed cable K2 ■	25m	9350150-p
H07RN-F 3G1,5 Rubber sheathed cable K2 ■	30m	9350132-p
H07RN-F 3G1,5 Rubber sheathed cable K2 ■	40m	9350015-p
H07RN-F 3G1,5 Rubber sheathed cable K2 ■	50m	9350160-p
H07RN-F 3G2,5 Rubber sheathed cable K2 ■	25m	9350142-p
H07RN-F 3G2,5 Rubber sheathed cable K2 ■	30m	9350167-p
H07RN-F 3G2,5 Rubber sheathed cable K2 ■	40m	9350202-p
H07RN-F 3G2,5 Rubber sheathed cable K2 ■	40m	9350025-p*
H07RN-F 3G2,5 Rubber sheathed cable K2 ■	50m	9350163-p



Cable type	Cat.No.
Empty reel 310 with central panel, 4x safety sockets with hinged lids, thermal protection and power indicator light, ready wired on main terminal, colour: black (without cable and plug) ■	8935097-p

...available on stock!

Equipment:

- 1 x CEE socket 16A 5p 6h 400V
- 3 x safety sockets (individual exchangeable), sealing bulge and self closing hinged lid 16A 250V
- Thermal protection and CEE-plug 16A 5p 400V

IP54

Cable type	Cable length	Cat.No.
H07BQ-F 5G2,5 Polyurethane cable K2 ■	25m	9350189-p
H07BQ-F 5G2,5 Polyurethane cable K2 ■	30m	9350008-p
H07RN-F 5G2,5 Rubber sheathed cable K2 ■	25m	9350235-p
H07RN-F 5G2,5 Rubber sheathed cable K2 ■	33m	9350042-p



Kabeltype	Best.Nr.
Empty reel 310 with central panel, 4x safety sockets with hinged lids, thermal protection and power indicator light, ready wired on main terminal, colour: black (without cable and plug) ■	8935096-p

Equipment:

- 2 x CEE sockets 16A 5p 400V
- Thermal protection and CEE-plug 16A 5p 400V

IP54

Cable type	Cable length	Cat.No.
H07BQ-F 5G2,5 Polyurethane cable K2 ■	30m	9350022-p
H07RN-F 5G2,5 Rubber sheathed cable K2 ■	25m	9350245-p



*French/Belgian system with shutter

Equipment samples (other versions on request!)

CEE extension cables 16A / 32A

- Extension cable 25m with GRIP CEE plug and CEE connector (nickel-plated contacts)
- IP-rating IP44/54

...available on stock!

Cable type	Plug/Connector	Cable length	Cat.No.
H07RN-F rubber sheathed cable 5G2,5	16A 5p 400V	25m	825525114v
H07RN-F rubber sheathed cable 5G6	32A 5p 400V	25m	825506214v



Extension cables



Extension cable rubber sheathed H07RN-F IP44/54

with GRIP CEE plug and CEE connector (nickel-plated contacts)

Cable length	Cable type	Plug/Connector	Cat.No.
25m	H07RN-F rubber sheathed cable 5G2,5	16A 5p 400V	825525114v
25m	H07RN-F rubber sheathed cable 5G6	32A 5p 400V	825506214v

 ...available on stock!



Extension cable rubber sheathed H07RN-F 3G1,5 IP44

with molded **rubber safety plug** and **3-way connector** with cap 16A 250V

Cable length	safety plug + 3-way connector
	3G1,5
1,5m	980901315684-p
5m	95247



Extension cable rubber sheathed H07RN-F 3G1,5 IP44

with molded **rubber safety plug** and **3-way connector** with hinged lid 16A 250V

Cable length	safety plug + 3-way connector
	3G1,5
1,5m	9809013156884-p



Extension cable PUR H07BQ-F 5G2,5 IP44

with mounted **CEE plug GRIP** 16A 5p 400V and **3-way connector** with hinged lid and 5 pole connection terminal 16A 250V

Cable length	CEE plug 16A + 3-way connector
	5G2,5
5m	9809055251882-p
10m	9809105251882-p
25m	9809255251882-p



Extension cable PUR H07BQ-F IP44

with mounted **TAURUS2 safety plug** and **3-way connector** with cap 16A 250V

Cable length	safety plug + 3-way connector	
	3G1,5	3G2,5
5m	980905315582-p	980905325582-p
10m	980910315582-p	980910325582-p
25m	980925315582-p	980925325582-p
50m		980950325582-p

LED worklights

	PCE mini LED	PCE maxi LED
Power/Voltage	40W / 220-240V~ (50-60Hz)	108W / 220-240V~ (50-60Hz)
Lighting current / Luminous colour	5600 lm / 5000 Kelvin	10600 lm / 5000 Kelvin
Protection	IP54 / IK08	IP54 / IK08
Cable	5m H07RN-F 3G1,5 with safety plug	5m H07RN-F 3G1,5 with safety plug
	incl. switch (ON/OFF) and additional safety socket with lid on the side	incl. 2 pcs. safety socket with lid (backside) and ON/OFF switch
	4303020	4307520



LED Floodlight A2800

180° rotatable joint incl. magnet, fold-out hook, incl. charge control and remaining capacity display,

powerbank function

- Li-Ion battery 3,7V / 6600mAh / 24,42 Wh
- incl. charging cable: USB Typ A→ USB Typ-C
- protection: **IP64 / IK08**

Functions	100%	50%	25%
Luminous flux	2800 lm	1400 lm	700 lm
Light duration	3 h	7 h	13 h

Dimensions: 178 x 125 x 46 mm / weight: 685g

7202800



LED Headlight S800

sensor function for touchfree switching on and off, 36° swiveling, adjustable head band, additionally with red LED

- Li-Ion battery 3,7V / 2000mAh / 7,4 Wh
- Luminous flux (spot+flood): 800 lm
- Light duration (spot+flood): 2 h
- incl. charging cable: USB Typ A→ USB Typ-C
- protection: **IPx6**

Functions	LED Spot	LED flood	LED red
2 steps (+stepless)	100% / 40%	100% / 40%	100%
Luminous flux	500 / 200 lm	500 / 200 lm	5 lm
Light duration	3 h / 8 h	3 h / 8 h	30 h

Dimensions: 82 x 43 x 45 mm / weight: 126g

720800



LED Handlight Pocket 400

magnet on the bottom, base can be swivelled 180°, suspension hook can be swivelled 180° and rotated 360°, belt clip

- Li-Po battery 3,7V / 1500mAh / 5,55 Wh
- incl. charging cable: USB Typ A→ USB Typ-C
- protection: **IP65**

Functions	main-LED 4W	top-LED 2W
Dimming wheel	10% - 100%	-
Luminous flux	120 - 400 lm	150 lm
Light duration	6 - 2,5 h	6 h

Dimensions: 121 x 60 x 26 mm / weight: 132g



720400

LED Handlight H1000

magnets on the bottom and rear, bottom can be swiveled and rotated, suspension hook, dimmable **emergency light function**

- Li-Ion battery 3,7V / 5000mAh / 18,5 Wh
- incl. charging cable (USB-C) and charging station
- protection: **IP54**

Functions	main-LED 10W	top-LED 2W
Dimming wheel	10% - 100%	-
Luminous flux	60 - 1000 lm	180 lm
Light duration	3,25 - 46 h	9,25 h

Dimensions: 256 x 58 x 38 mm / weight: 426g



7201000

LED Mini-worklight Penlight P600

magnet on the bottom and rear, belt clip, **boost function** (600 lumen), USB-C, sturdy aluminum housing

- Li-Po battery 3,7V / 850mAh / 3,145 Wh
- incl. charging cable: USB Typ A→ USB Typ-C
- protection: **IPx3**

Functions	100%	30%	Boost
Luminous flux	300 lm	100 lm	600 lm
Light duration	2 h	5 h	< 1 min.

Dimensions: 90,1 x 23,1 x 17,4 mm / weight: 45g



720600

LED Penlight PL850RZ

compact design, belt clip, **boost function** (up to 850 lumen), focusable, ribbed grip, USB-C, aluminum housing

- Li-Po battery 3,7V / 720mAh / 2,66 Wh
- incl. charging cable: USB Typ A→ USB Typ-C
- protection: **IP65**

Functions	100%	50%	Boost
Luminous flux	500 lm	250 lm	850 lm
Light duration	1,5 h	3 h	< 30 sec.

Dimensions: 152,5 x 17 x 17 mm / weight: 72g



720850

PCE

Connection
to the future

PC Electric Gesellschaft.m.b.H.

Diesseits 145 · 4973 St. Martin im Innkreis · AUSTRIA

TEL +43 7751 61220 · office@pcelectric.at · www.pcelectric.at



09845 Vers. 02/2026 EN

For additional technical information please refer to our main catalogue, visit our website www.pcelectric.at or contact our salesteam!

